



| RevNo | Revision Notes | Date | Checked |
|-------|----------------|--------|---------|
| 1 | RoHS Compliant | 100605 | PC |

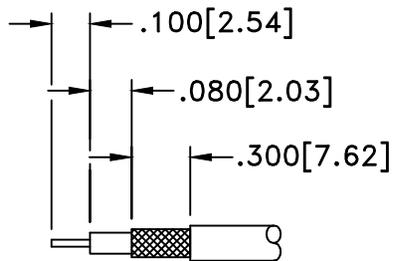

STRIP LENGTHS
M17/113-RG316

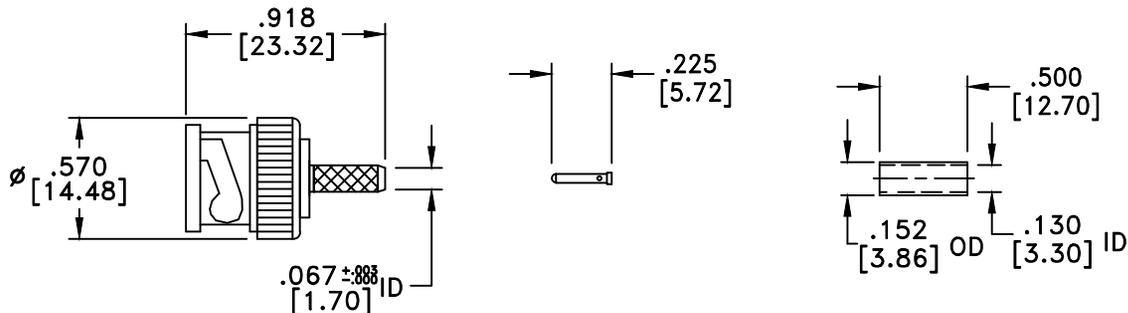

RoHS Compliant

MATERIALS

| | |
|-----------------|--------|
| BODY | BRASS |
| BODY PLATING | NICKEL |
| CONTACT | BRASS |
| CONTACT PLATING | GOLD |
| DIELECTRIC | TEFLON |

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

BNC MALE CRIMP CABLE END
for RG316

| | | | | |
|------------------------|----------------------|-----------------------|---------------------------|-----------------------|
| Designed by P. CHEN | Checked by N.JAIN | Approved by A. LEE | File name MW-266-A-316 | TITLE MW-266-A-316 |
|------------------------|----------------------|-----------------------|---------------------------|-----------------------|

TOLERANCES
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
DECIMALS ANGULAR
.XX ± .02 ± .06
.XXX ± .005

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE
PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

| | |
|----------------|-----------------|
| REV. 1 | Scale NONE |
| DATE 100605 | Sheet 1 of 1 |