


RECOMMENDED  
MOUNTING HOLE

RoHS Compliant

RevNo	Revision Notes	Date	Checked
1	Drawing reformatted	030101	G.C.
2	Solder lug added; materials clarified	042601	G.C.
3	Dielectric Material Clarified	071801	G.C.
4	RoHS Compliant	072805	G.C.
5	Coupling body length defined	071607	G.C.

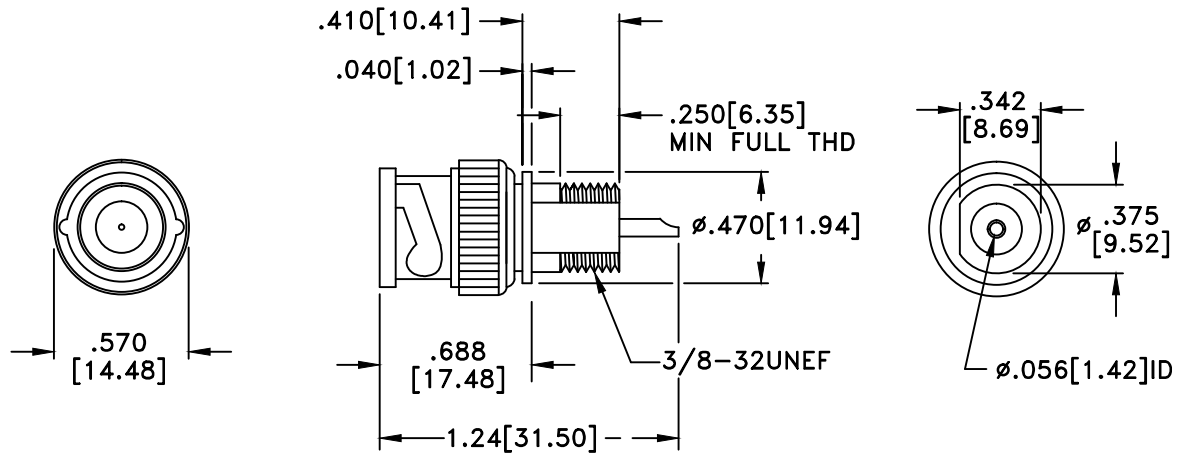

INCLUDES HEX NUT, INTERNAL TOOTH LOCKWASHER AND SOLDER LUG

**MATERIAL**

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
HEX NUT	BRASS
HEX NUT PLATING	NICKEL
LOCK WASHER	SPRING STEEL
WASHER PLATING	NICKEL
SOLDER LUG	STEEL
LUG PLATING	NICKEL

50 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			BNC MALE BULKHEAD FRONT MOUNT			
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MW-215D	TITLE MW-215D		
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS      ANGULAR .XX ± .02      ± .06 .XXX ± .005      ± .01 DO NOT SCALE THIS DRAWING			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 5 DATE 020101	Scale NONE Sheet 1 of 1