



STRIP LENGTHS  
M17/117-RG316



RECOMMENDED  
MOUNTING HOLE

RoHS Compliant

RevNo	Revision Notes	Date	Checked
1	Initial Release	062007	PC
2	Overall design change	062107	PC
3	Flat Rotated 90 degrees	072707	PC
4	Flat Rotated 90 degrees	081607	GC

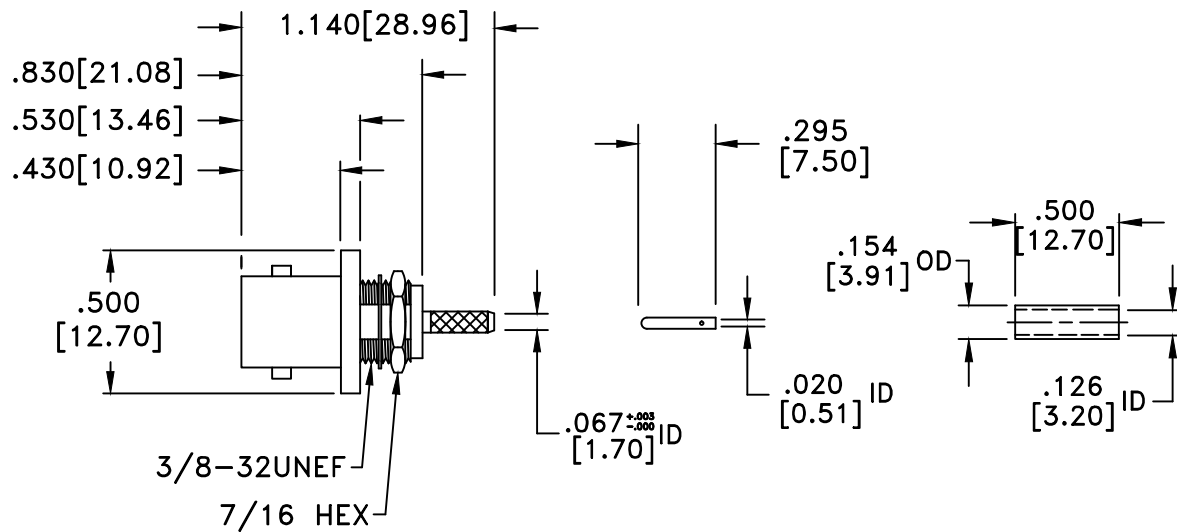

**MATERIALS**

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	PHOSPHOR BRONZE
CONTACT PLATING	GOLD
DIELECTRIC	DELTRIN

50 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		BNC FEMALE FRONT MOUNT CRIMP CABLE END for RG316	
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-233-A-316
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS .XX ± .02 .XXX ± .005		TITLE MW-233-A-316	
ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 4	Scale NONE
		DATE 062007	Sheet 1 of 1