



RevNo	Revision Notes	Date	Checked
1	Ferrule ID/OD changed	042505	PC

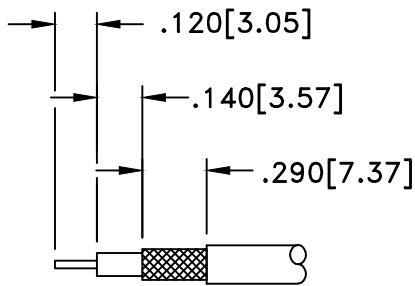

STRIP LENGTHS
M17/113-RG316

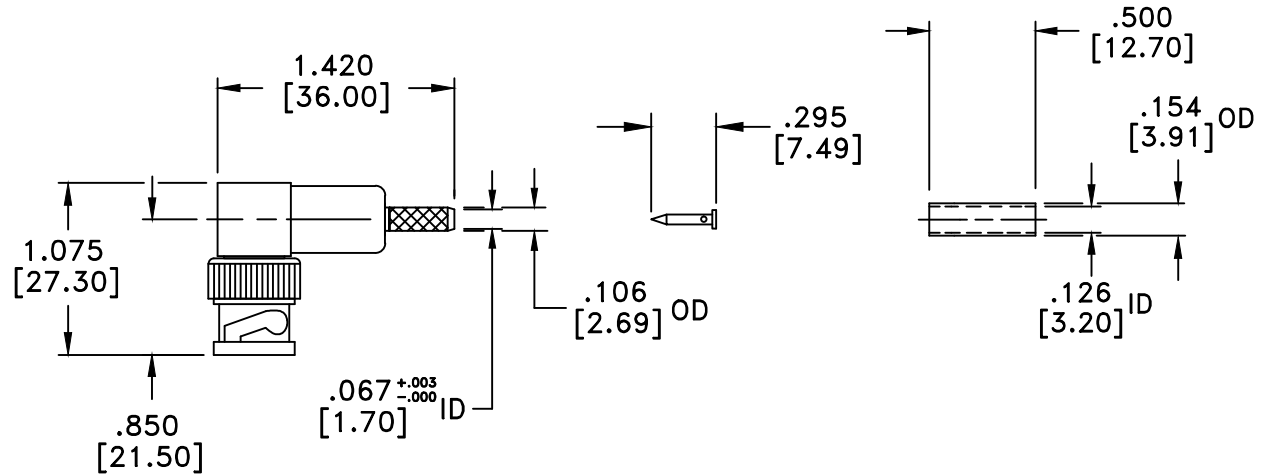

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

BNC MALE R/A
CRIMP CABLE END
for RG316

Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-266R-316	TITLE MW-266R-316
------------------------	--------------------------	-----------------------	--------------------------	----------------------

TOLERANCES
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
DECIMALS ANGULAR
.XX ± .02 ± .06
.XXX ± .005

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE
PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

REV. 1	Scale NONE
DATE 041105	Sheet 1 of 1