



STRIP LENGTHS
M17/94-RG179



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	080605	PC
2	Cable contact redesigned to "bullet" style	110206	GC
3	Gasket specified	121306	GC
4	Reference dimensions added	012910	GC
5	Overall length tolerance changed to ±.010"	020410	GC

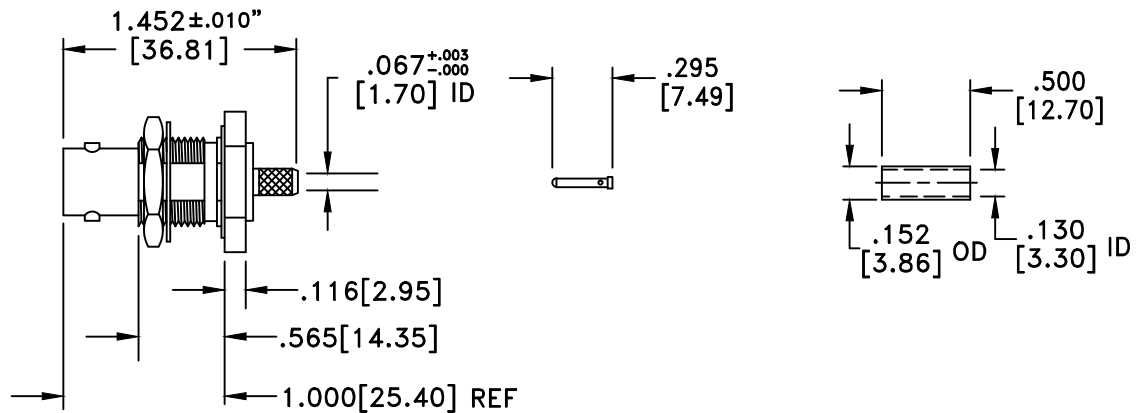

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	PHOSPHOR BRONZE
CONTACT PLATING	GOLD
DIELECTRIC	DELRIN
GASKET	SILICONE

75 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

BNC FEMALE BULKHEAD MOUNT
CRIMP CABLE END
for RG179 (75 OHMS)

Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-280-E-17975A	TITLE MW-280-E-17975A
------------------------	--------------------------	-----------------------	------------------------------	--------------------------

TOLERANCES
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
DECIMALS ANGULAR
.XX ± .02 ± .06
.XXX ± .005

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE
PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

REV. 5	Scale NONE
DATE 111202	Sheet 1 of 1