


RECOMENDED
MOUNTING HOLE

RevNo	Revision Notes	Date	Checked
1	O-ring added	052404	GC
2	RoHS Compliant	052305	GC
3	Thread relief & O-ring detail added	103009	GC

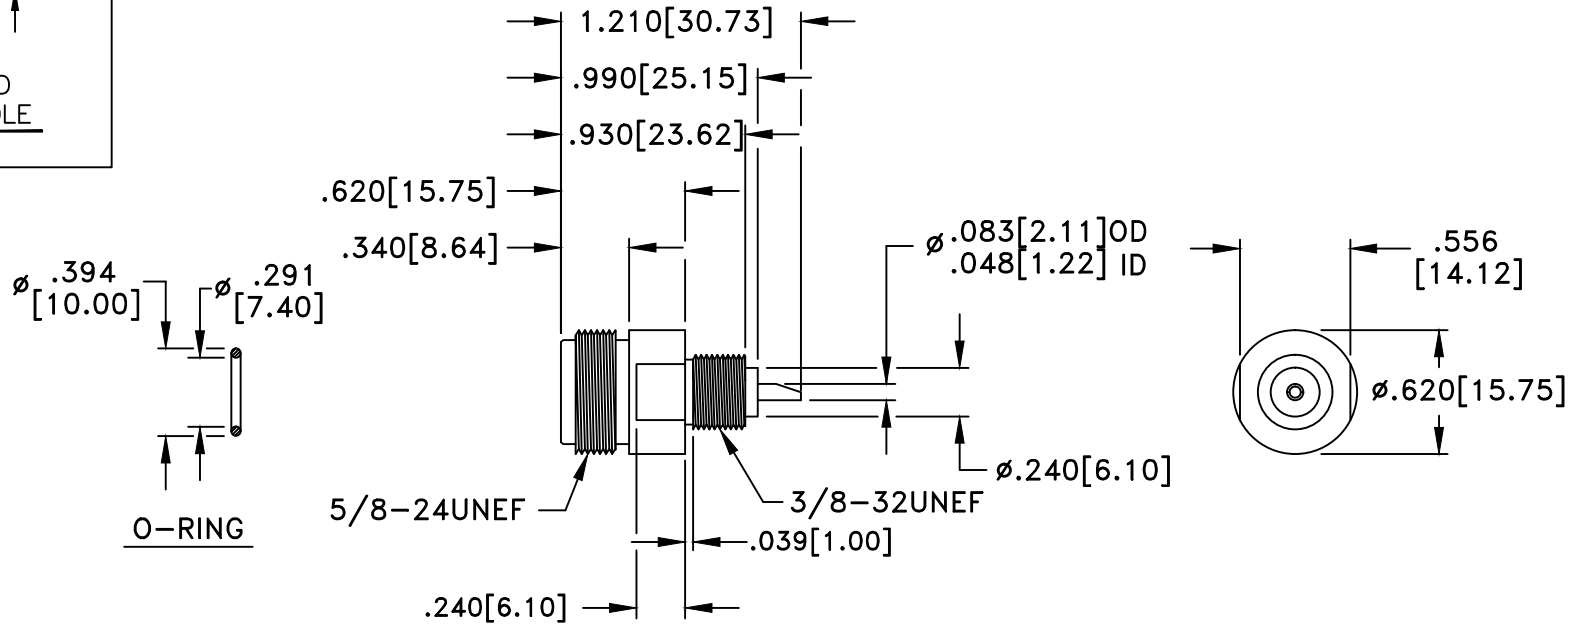

RoHS Compliant

NOTE: THREAD RELIEF ϕ .323[8.20]

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	PHOSPHOR BRONZE
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

N FEMALE BULKHEAD
REDUCED THREAD

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MW-319-T	TITLE MW-319-T
------------------------	------------------------	-----------------------	-----------------------	-------------------

TOLERANCES
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
DECIMALS ANGULAR
.XX ± .02 ± .06
.XXX ± .005

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE
PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

REV. 3	Scale NONE
DATE 041201	Sheet 1 of 1