


STRIP LENGTHS
RG58/U

RevNo	Revision Notes	Date	Checked
1	Overall design change	102703	PC
2	Ferrule ID and OD changed	011004	GC
3	RoHS compliant	091505	GC

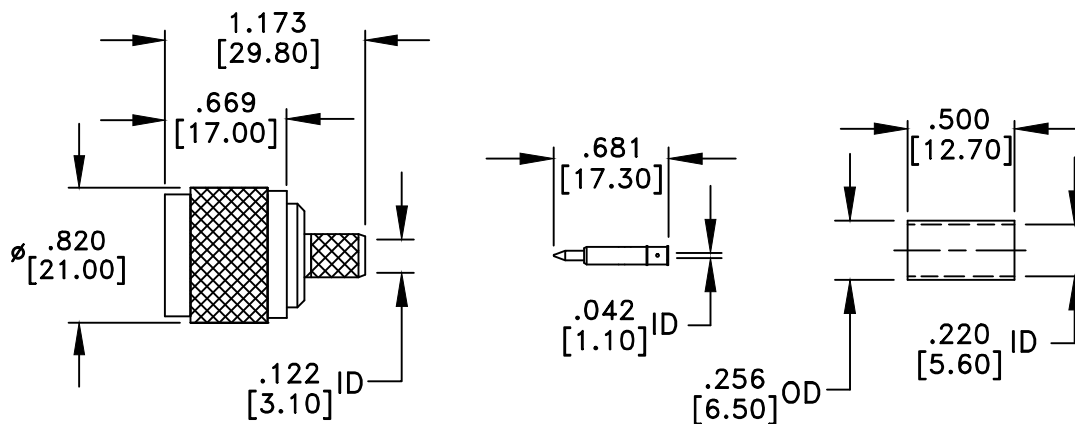

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
GASKET	SILICONE RUBBER

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		N PLUG CRIMP CABLE END for RG58/U	
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-350-58
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS .XX ± .02 .XXX ± .005		TITLE MW-350-58	
ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 3	Scale NONE
		DATE 102303	Sheet 1 of 1