



RevNo	Revision Notes	Date	Checked
1	Initial Release	022614	PC

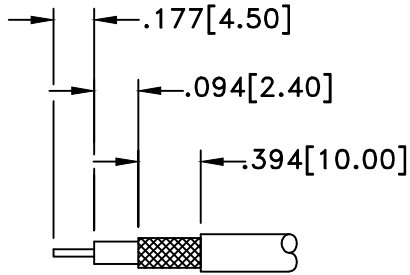

STRIP LENGTHS  
LMR240

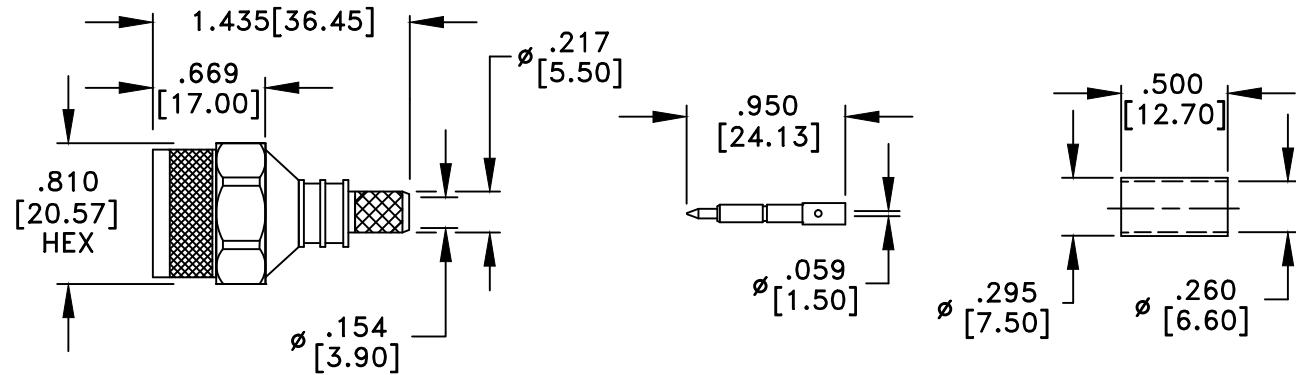

RoHS Compliant

### MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
GASKET	SILICONE

50 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES  
6501 W. FRYE ROAD, #23  
CHANDLER, AZ 85226

N PLUG CRIMP CABLE END  
w/SEPARATE CONTACT  
for LMR240

Designed by G. COLEMERE	Checked by S. NEUGESS	Approved by A. LEE	File name MW-350-NT-L240	TITLE MW-350-NT-L240
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS                      ANGULAR .XX ± .02                      ± .06 .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
			REV. 1	Scale NONE
			DATE 022614	Sheet 1 of 1