



RevNo	Revision Notes	Date	Checked
1	Initial Release	020111	PC

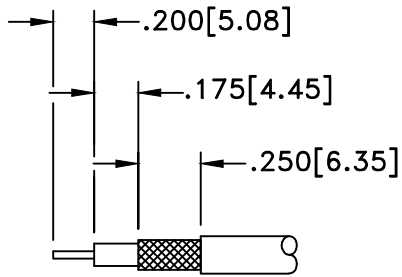

STRIP LENGTHS
LMR400

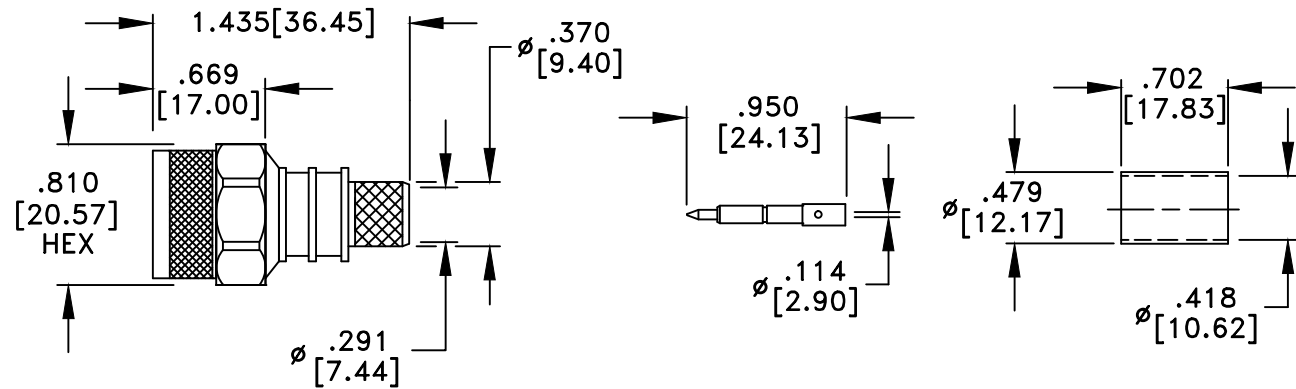

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
GASKET	SILICONE

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

N PLUG CRIMP CABLE END
w/SEPARATE CONTACT
for LMR400

Designed by G.COLEMERE	Checked by S. NEUGESS	Approved by A. LEE	File name MW-350-NT-L400	TITLE MW-350-NT-L400
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS .XX ± .02 .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
			REV. 1	Scale NONE
			DATE 020111	Sheet 1 of 1