






RevNo	Revision Notes	Date	Checked
1	Initial Release	081004	PC

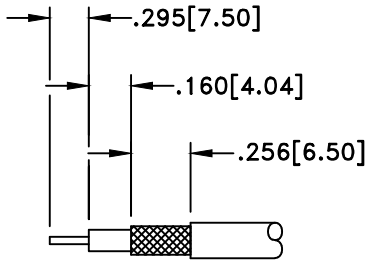

STRIP LENGTHS
M17/113-RG316



RECOMMENDED
MOUNTING HOLE

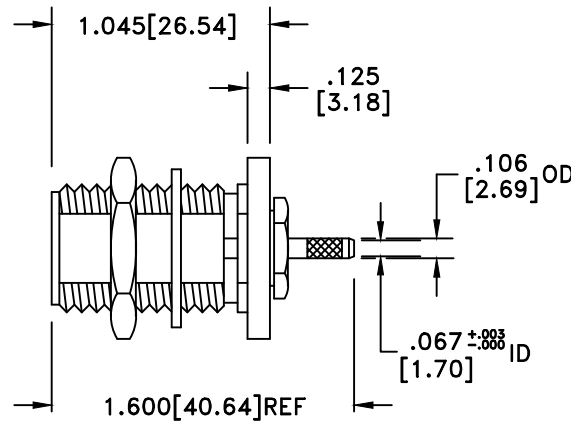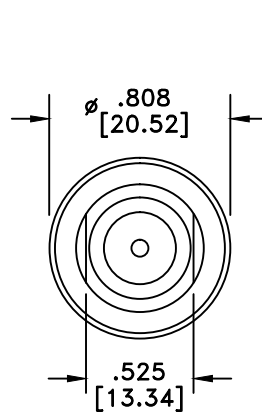

RoHS COMPLIANT

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
GASKET	RUBBER

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

NOTE: SUPPLIED WITH O-RING GASKET

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			N BULKHEAD JACK CRIMP/SOLDER TYPE CABLE END for RG316			
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-380-316	TITLE MW-380-316		
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS .XX ± .02 .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 1 DATE 081004	Scale NONE Sheet 1 of 1