




RevNo	Revision Notes	Date	Checked
1	Initial Release	091508	PC

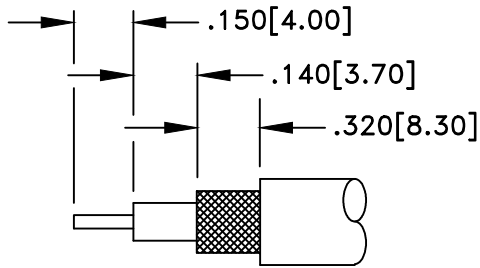

STRIP LENGTHS
RG58



RECOMMENDED
MOUNTING HOLE

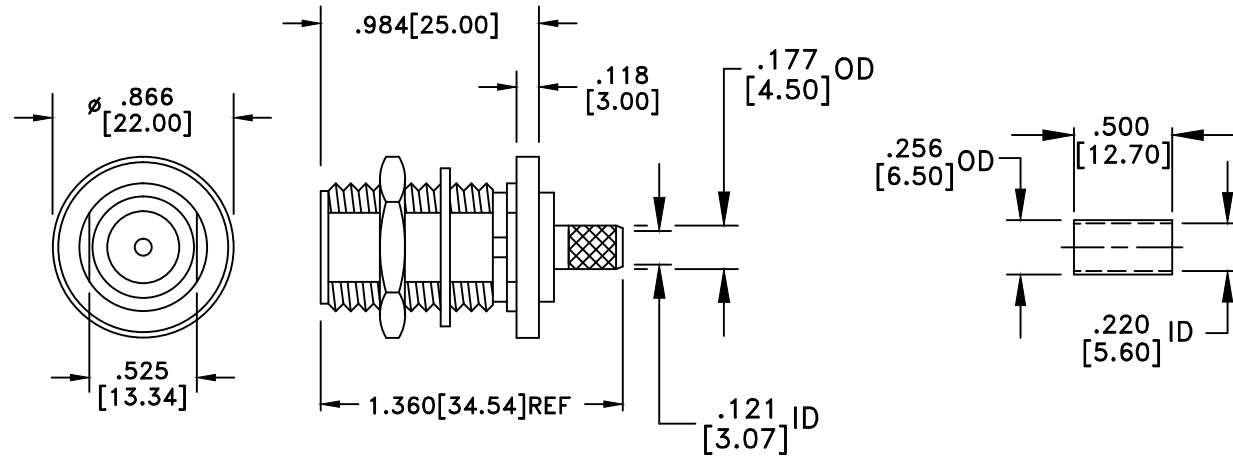

RoHS COMPLIANT

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
GASKET	RUBBER

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

NOTE: SUPPLIED WITH O-RING GASKET, NUT & WASHER

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			N BULKHEAD JACK CRIMP/SOLDER TYPE CABLE END for RG58			
Designed by G. COLEMERE	Checked by S. NEUGESS	Approved by A. LEE	File name MW-380-58	TITLE MW-380-58		
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 1 DATE 091508	Scale NONE Sheet 1 of 1