



| RevNo | Revision Notes | Date | Checked |
|-------|--|--------|---------|
| 1 | Tolerances added to shank ID; RoHS Compliant | 101204 | GC |
| 2 | Contact material clarified | 051005 | GC |

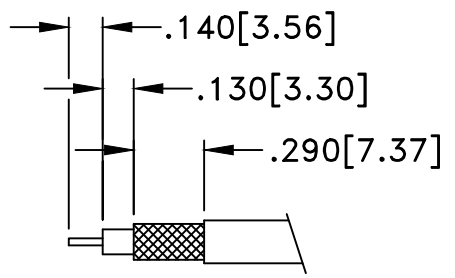

STRIP LENGTHS
M17/28-RG58

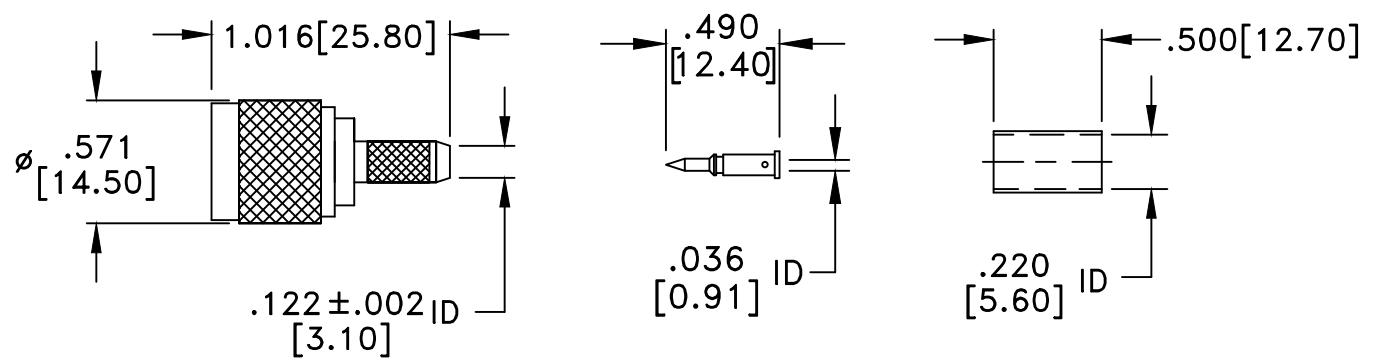

RoHS Compliant

| MATERIALS | |
|-----------------|---------------|
| BODY | BRASS |
| BODY PLATING | NICKEL |
| CONTACT | BRASS |
| CONTACT PLATING | GOLD |
| DIELECTRIC | TEFLON (PTFE) |
| GASKET | SILICONE |

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

| | | | | | | |
|---|--------------------------|-----------------------|--|--------------------|-----------------------------|----------------------------------|
| MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226 | | | TNC PLUG CRIMP CABLE END for RG58 | | | |
| Designed by P. CHEN | Checked by S. NEUGESS | Approved by A. LEE | File name MW-750-58 | TITLE MW-750-58 | | |
| <small>TOLERANCES</small> <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 | | | ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE. | | REV. 2 DATE 100804 | Scale NONE Sheet 1 of 1 |