





RevNo	Revision Notes	Date	Checked
1	Initial Release	072601	GC
2	Threads extended	080709	GC
3	Termination method changed to solder cup	072016	GC
4	Dimensions corrected to meet metric dims	072516	GC

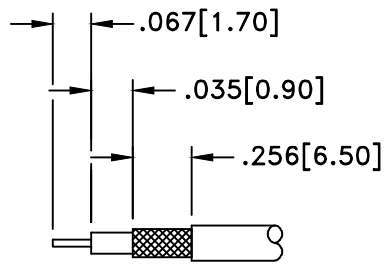

STRIP LENGTHS
M17/113-RG316



RECOMMENDED
MOUNTING HOLE

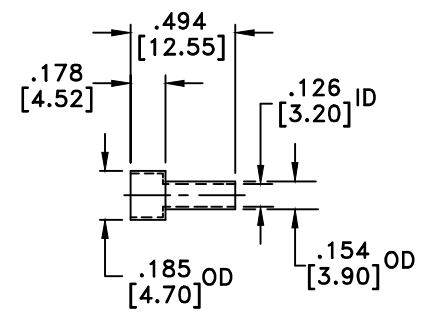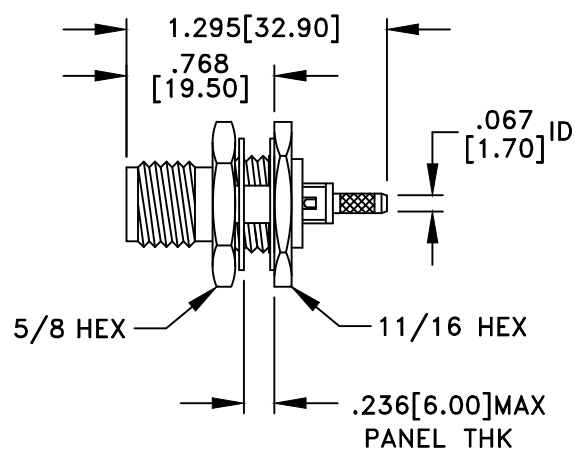

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	PHOSPHOR BRONZE
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
O-RING GASKET	SILICONE RUBBER

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

TNC FEMALE BULKHEAD
CRIMP CABLE END
for RG316

Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-780-E-316	TITLE MW-780-E-316	
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS .XX ± .02 .XXX ± .005		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 4 DATE 072601	Scale NONE Sheet 1 of 1