




RevNo	Revision Notes	Date	Checked
1	Initial Release	012715	GC

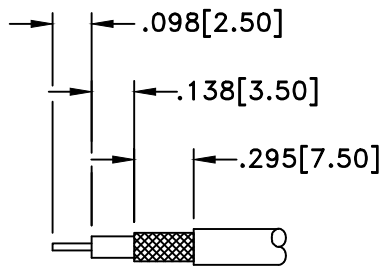

STRIP LENGTHS
RG58



RECOMMENDED
MOUNTING HOLE

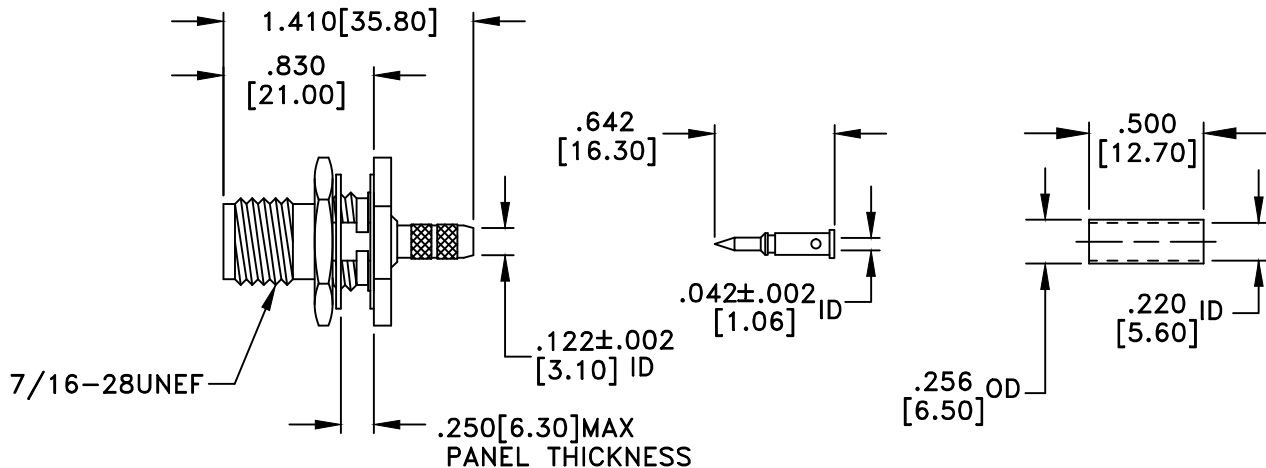

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON
O-RING	SILICONE RUBBER

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

TNC JACK BULKHEAD
REVERSE POLARITY
CRIMP CABLE END
for RG58

Designed by G.COLEMERE	Checked by P.CHEN	Approved by A. LEE	File name MW-780-E-RP-58	TITLE MW-780-E-RP-58
<p>TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005</p>				<p>ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.</p>
				<p>REV. 1 Scale NONE DATE 012715 Sheet 1 of 1</p>