



RevNo	Revision Notes	Date	Checked
1	Initial Release	072010	GC





RECOMENDED MOUNTING HOLE

ACCEPTS MALE PIN  
 $\varnothing.020[0.50] - .047[1.19]$



.512[13.00]HEX

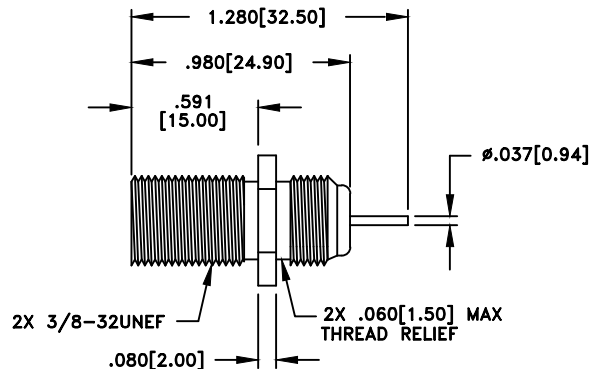

RoHS Compliant

**MATERIALS**

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS/BeCu
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON
O-RING	VITON

75 Ohm IMPEDANCE  
 500V PEAK VOLTAGE RATING  
 TEMPERATURE RANGE: -55°C TO +155°C  
 INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

NOTES: O-RING INCLUDED

MILLIMETER WAVE TECHNOLOGIES  
 6501 W. FRYE ROAD, #23  
 CHANDLER, AZ 85226

F FEMALE BULKHEAD MOUNT  
 WATER RESISTANT

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MW-810-I-75	TITLE MW-810-I-75
------------------------	------------------------	-----------------------	--------------------------	----------------------

TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS                      ANGULAR .XX ± .02                              ± .06 .XXX ± .005	ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	REV. 1	Scale NONE
		DATE 072010	Sheet 1 of 1