


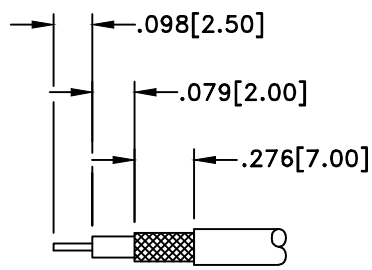


RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	051005	GC

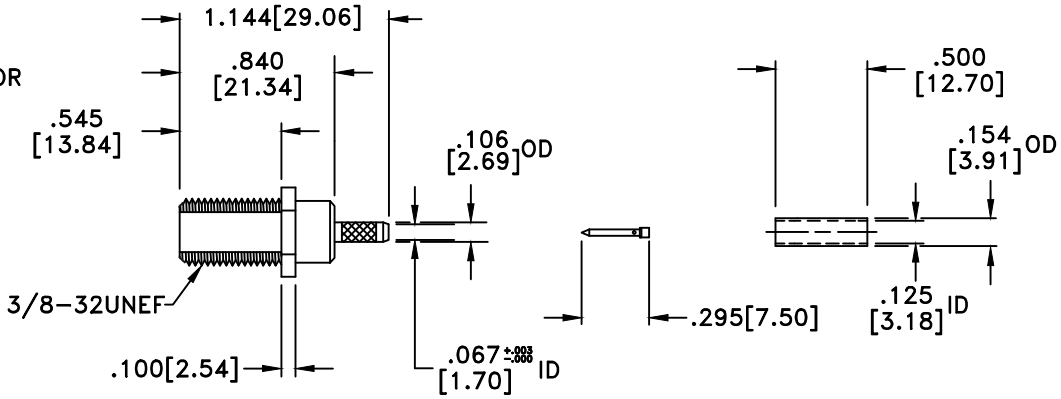

STRIP LENGTHS
M17/94-RG179

ACCEPTS MALE PIN/
CABLE CENTER CONDUCTOR
Ø.020[.50]-.047[1.19]



RoHS Compliant

MATERIAL	
BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS/BeCu
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
75 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			F FEMALE BULKHEAD CABLE END for RG179 FLAT NOSE			
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MW-820-179-75DK	TITLE MW-820-179-75DK		
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS .XX ± .02 .XXX ± .005 ANGULAR ± .06			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 1 DATE 052901	Scale NONE Sheet 1 of 1