




RevNo	Revision Notes	Date	Checked
1	Initial Release	112607	GC

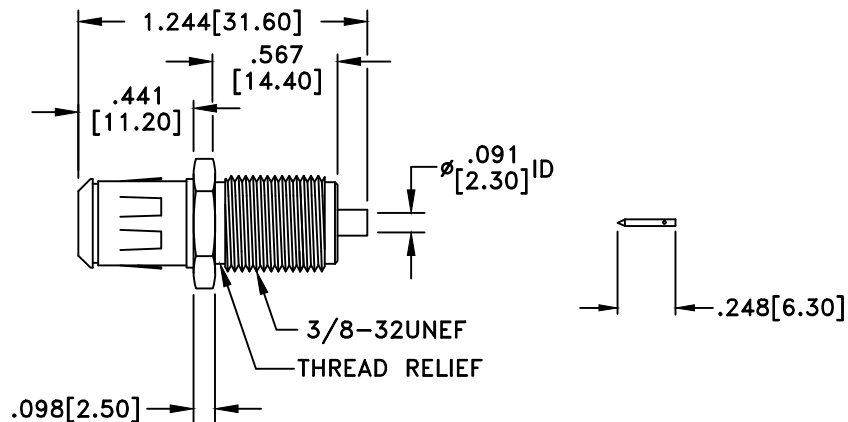

MUST ACCEPT  
 $\phi .040$  [1.02]  
 MAX PIN



RoHS Compliant

**MATERIALS**

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS/BeCu
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON

75 Ohm IMPEDANCE  
 500V PEAK VOLTAGE RATING  
 TEMPERATURE RANGE: -55°C TO +155°C  
 INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES  
 6501 W. FRYE ROAD, #23  
 CHANDLER, AZ 85226

G JACK FRONT PANEL MOUNT  
 SOLDER END for .086" S/R  
 HIGH PERFORMANCE

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MW-828-086-75	TITLE MW-828-086-75
------------------------	------------------------	-----------------------	----------------------------	------------------------

**TOLERANCES**  
 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED  
 DECIMALS ANGULAR  
 .XX ± .02 ± .06  
 .XXX ± .005

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE  
 PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

REV. 1	Scale NONE
DATE 112607	Sheet 1 of 1