
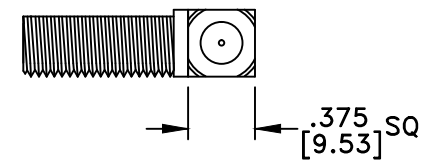
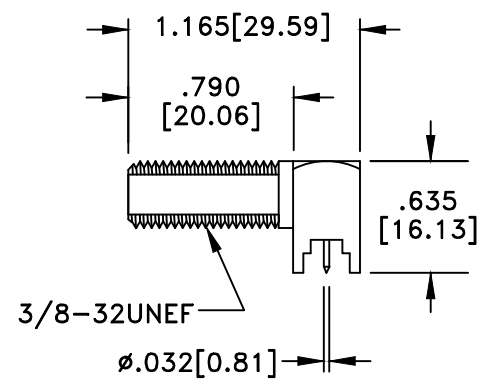


RoHS Compliant

RevNo	Revision Notes	Date	Checked
1	Barrel and Overall Length Increased +.040"	081201	G.C.
2	Board Contact Diameter Reduced from .032" to .025"	082301	G.C.
3	Recommended Hole Pattern Changed	082301	G.C.
4	Board Contact Diameter Returned to .032" from .025"; Hole Pattern Changed	090601	G.C.
5	Nose Flat Diameters Added; Chamfer Drawn	102401	G.C.
6	Chamfers Added to Box Corners	031102	G.C.
7	RoHS Compliant	070105	PC

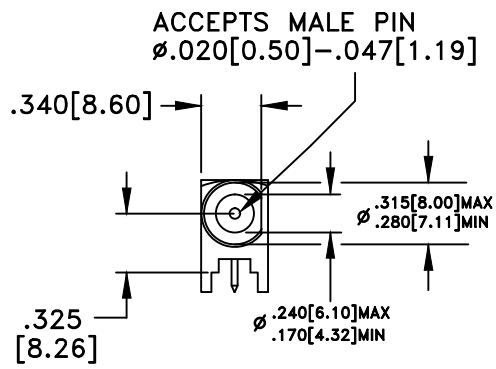

MATERIAL	
BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS/BeCu
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
75 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			F FEMALE RIGHT ANGLE PCB MOUNT w/4 LEGS HIGH PERFORMANCE FLAT NOSE			
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MW-840-FN-75	TITLE MW-840-FN-75		
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 DO NOT SCALE THIS DRAWING			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 7 DATE 073001	Scale NONE Sheet 1 of 1