



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	071005	GC



RECOMMENDED MOUNTING HOLE

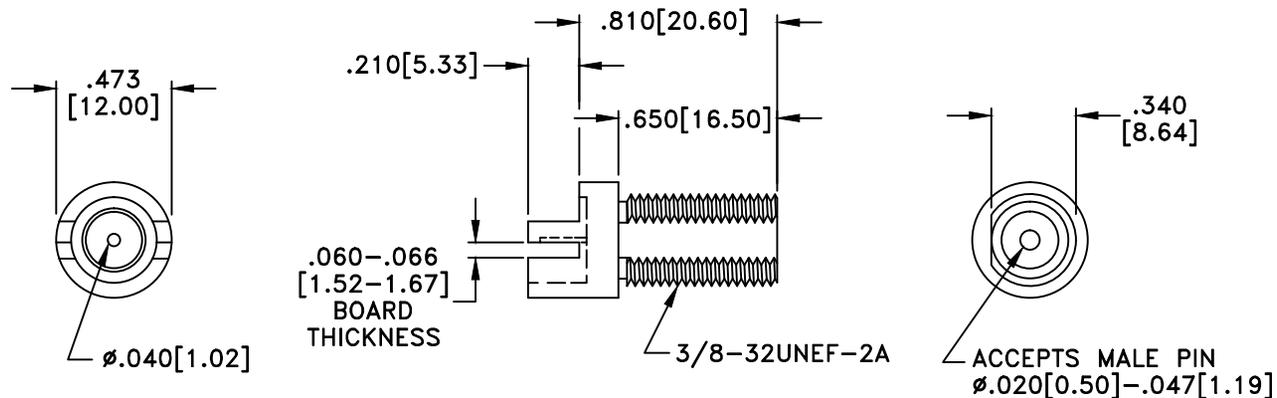

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	BRIGHT ACID TIN
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	30u" GOLD
DIELECTRIC	TEFLON (PTFE)

75 Ohm IMPEDANCE
 500V PEAK VOLTAGE RATING
 TEMPERATURE RANGE: -55°C TO +155°C
 INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
 6501 W. FRYE ROAD, #23
 CHANDLER, AZ 85226

F FEMALE PCB EDGE MOUNT
 EXTENDED BARREL
 H/P 75 OHMS

Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-846-C-DE-75	TITLE MW-846-C-DE-75
------------------------	--------------------------	-----------------------	-----------------------------	-------------------------

TOLERANCES
 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 DECIMALS ANGULAR
 .XX ± .02 ± .06
 .XXX ± .005

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

REV. 1	Scale NONE
DATE 031501	Sheet 1 of 1