



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	110705	PC



RECOMMENDED
MOUNTING HOLE

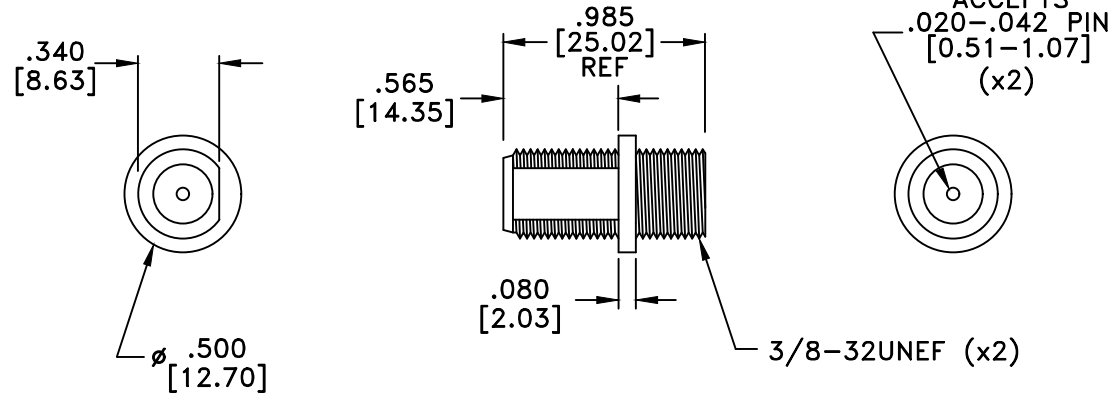

RoHS Compliant

NOTE: 3/8-32 UNEF HEX NUT AND INTERNAL TOOTH LOCKWASHER INCLUDED

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS/BeCu
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

75 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			ADAPTOR F FEMALE BULKHEAD TO F FEMALE HIGH PERFORMANCE			
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MW-872-D-75	TITLE MW-872-D-75		
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 ± .06 DO NOT SCALE THIS DRAWING			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 1 DATE 062001	Scale NONE Sheet 1 of 1