
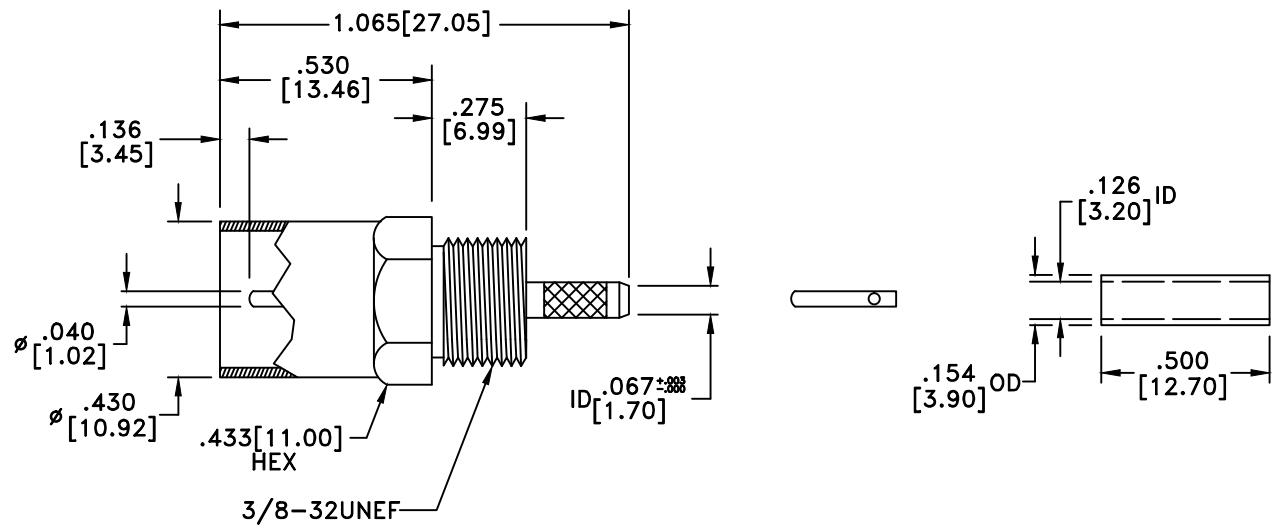


RevNo	Revision Notes	Date	Checked
1	Initial Release	041006	GC
2	Contact Design changed to "bullet" style; ferrule length changed	102507	GC
3	Pin depth clarified	012013	GC



RoHS Compliant

MATERIALS	
BODY	BRASS
BODY PLATING	BRIGHT ACID TIN
CONTACT	BRASS
CONTACT PLATING	BRIGHT ACID TIN
DIELECTRIC	TEFLON
75 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			G PLUG FRONT PANEL MOUNT CABLE END for RG179		
Designed by G. COLEMERE	Checked by P. CHEN	Approved by A. LEE	File name MW-876-179	TITLE MW-876-179	
TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES DECIMALS .XX ± .02 ANGULAR .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 3 DATE 041006 Scale NONE Sheet 1 of 1