



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	110205	PC
2	Contact thickness clarified	040309	GC



CABLE STRIP LENGTH

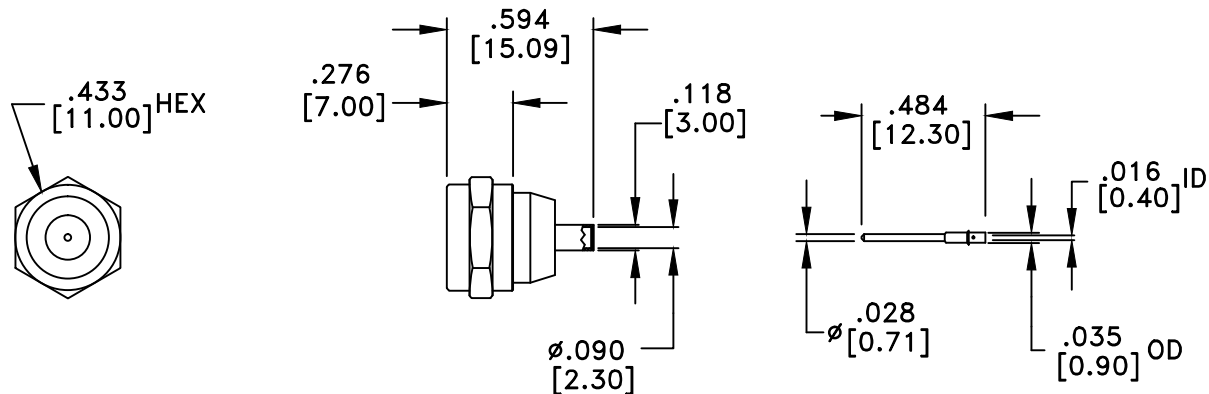

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
SHANK PLATING	GOLD
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

75 Ohm IMPEDANCE
 500V PEAK VOLTAGE RATING
 TEMPERATURE RANGE: -55°C TO +155°C
 INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		F PLUG SOLDER CABLE END for .086" SEMI-RIGID 75 OHMS	
Designed by N. JAIN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-886-086-75
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE MW-886-086-75	
DECIMALS .XX ± .02 .XXX ± .005	ANGULAR ± .06	ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
		REV. 2	Scale NONE
		DATE 041201	Sheet 1 of 1