
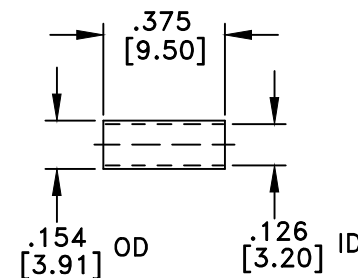
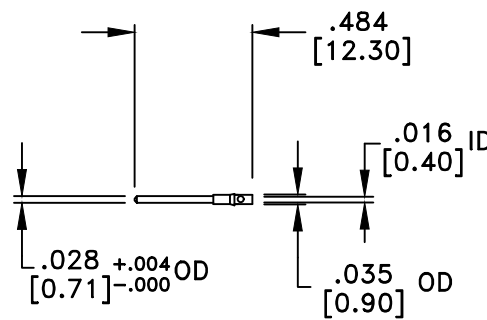


STRIP LENGTHS
M17/94-RG179

| RevNo | Revision Notes | Date | Checked |
|-------|---|--------|---------|
| 1 | RoHS Compliant | 051005 | PC |
| 2 | Overall Dimension Change | 081005 | PC |
| 3 | Shank Length, ID changed | 022406 | PC |
| 4 | REF Dimension added to overall and shank length | 103108 | GC |

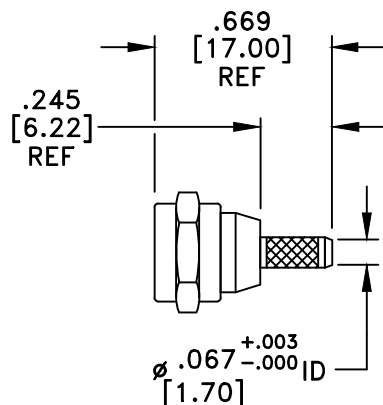

RoHS Compliant

MATERIAL

| | |
|-----------------|---------------|
| BODY | BRASS |
| BODY PLATING | NICKEL |
| CONTACT | BRASS |
| CONTACT PLATING | GOLD |
| DIELECTRIC | TEFLON (PTFE) |

75 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

NOTE: CONTACT EXTENDS .100"±.025 BEYOND END OF BODY

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

F MALE CRIMP CABLE END
for RG179

| | | | | |
|--|------------------------|---|------------------------------|---|
| Designed by N. JAIN | Checked by W. CANON | Approved by A. LEE | File name MW-886-A-179-75 | TITLE MW-886-A-179-75 |
| TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 ± .01 DO NOT SCALE THIS DRAWING | | ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE. | | REV. 4 DATE 032001 Scale NONE Sheet 1 of 1 |