


RECOMMENDED  
MOUNTING HOLE

RoHS Compliant

RevNo	Revision Notes	Date	Checked
1	Initial Release	021308	PC
2	Barrel length increased	021808	GC
3	Plating changed to bright acid tin	022708	GC
4	Barrel Length changed to .120"	022708	GC

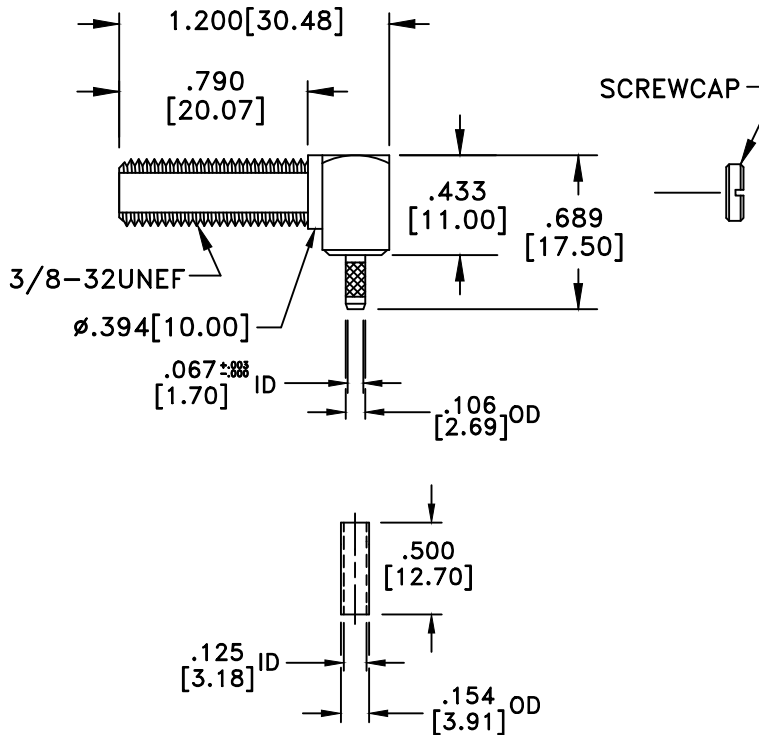

**MATERIAL**

BODY	BRASS
BODY PLATING	BRIGHT ACID TIN
CONTACT	BRASS/BeCu
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

75 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES  
6501 W. FRYE ROAD, #23  
CHANDLER, AZ 85226

F BULKHEAD JACK  
RIGHT ANGLE CRIMP TYPE  
for RG179, HIGH PERFORMANCE

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MW-892-179-75D	TITLE MW-892-179-75D
<p>TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED</p> <p>DECIMALS      ANGULAR</p> <p>.XX ± .02      ± .06</p> <p>.XXX ± .005      ± .01</p> <p>DO NOT SCALE THIS DRAWING</p>			<p>ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.</p>	
			REV. 4	Scale NONE
			DATE 021308	Sheet 1 of 1