


RECOMMENDED
HOLE PATTERN

| RevNo | Revision Notes | Date | Checked |
|-------|---|--------|---------|
| 1 | Initial Release | 041001 | PC |
| 2 | RoHS Compliant | 051005 | GC |
| 3 | Center pin diameter corrected to read .048" | 051409 | GC |

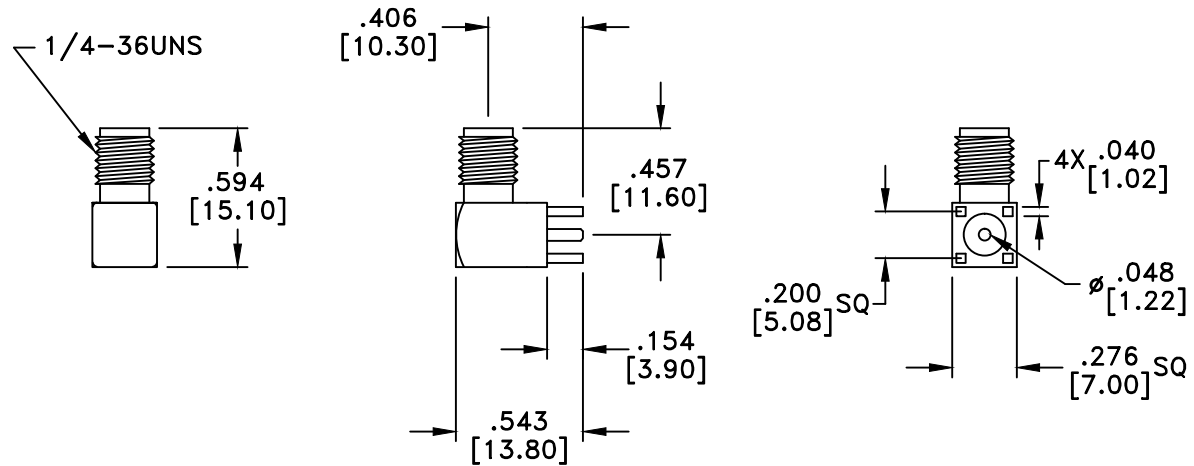

RoHS Compliant

MATERIALS

| | |
|-----------------|------------------|
| BODY | BRASS |
| BODY PLATING | GOLD |
| CONTACT | BERYLLIUM COPPER |
| CONTACT PLATING | GOLD |
| DIELECTRIC | TEFLON (PTFE) |

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

SMA FEMALE JACK
RIGHT ANGLE PCB MOUNT

| | | | | |
|--|--------------------------|--|-------------------------|----------------------------------|
| Designed by P. CHEN | Checked by S. NEUGESS | Approved by A. LEE | File name MWA-3300-G | TITLE MWA-3300-G |
| TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS .XX ± .02 .XXX ± .005 | | ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE. | | REV. 3 DATE 041001 |
| | | | | Scale NONE Sheet 1 of 1 |