


STRIP LENGTH
M17/28-RG58/U

RevNo	Revision Notes	Date	Checked
1	Overall Length Increased	082802	PC
2	Ferrule Dimensions, Shank ID Adjusted	102402	PC
3	RoHS Compliant	072205	PC
4	Length revised; ferrule diameters revised	042911	PC

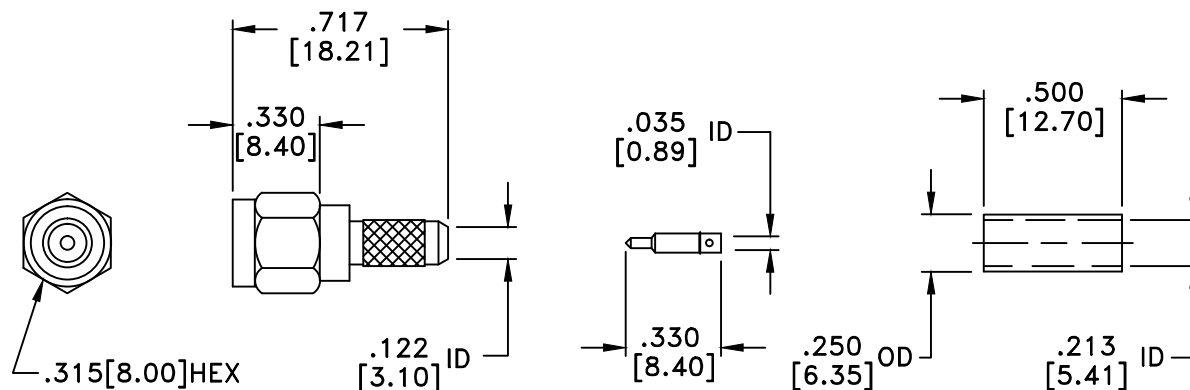

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
FERRULE	BRASS
FERRULE PLATING	NICKEL

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE RD., #23 CHANDLER, AZ 85226		SMA MALE CRIMP CABLE END w/SEPARATE CONTACT for RG58	
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWA-6001-58
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE MWA-6001-58	
DECIMALS .XX ± .02 .XXX ± .005	ANGULAR ± .06	ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
		REV. 4	Scale NONE
		DATE 020201	Sheet 1 of 1