


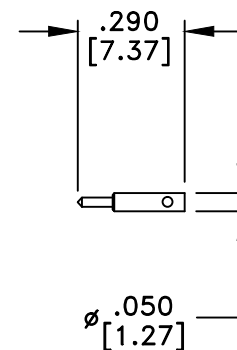


RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	052005	PC

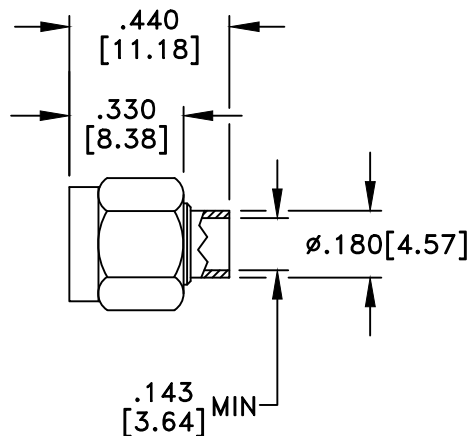

STRIP LENGTHS
M17/130-RG402



RoHS Compliant

MATERIALS

BODY	STAINLESS STEEL
BODY PLATING	PASSIVATED
CONTACT	BRASS
CONTACT PLATING	50u" GOLD
DIELECTRIC	TEFLON (PTFE)
RETAINING RING	BERYLLIUM COPPER
GASKET	SILICONE RUBBER

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		SMA MALE SOLDER CABLE END w/SEPARATE CONTACT for .141 SEMI-RIGID	
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWA-6010AS-141
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE MWA-6010AS-141	
DECIMALS .XX ± .02 .XXX ± .005	ANGULAR ± .06	ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
		REV. 1	Scale NONE
		DATE 042301	Sheet 1 of 1