





RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	051005	PC



RECOMMENDED  
MOUNTING HOLE



STRIP LENGTHS  
M17/113-RG316

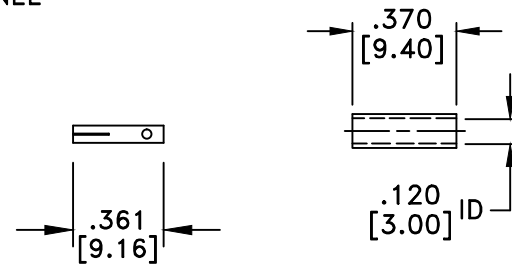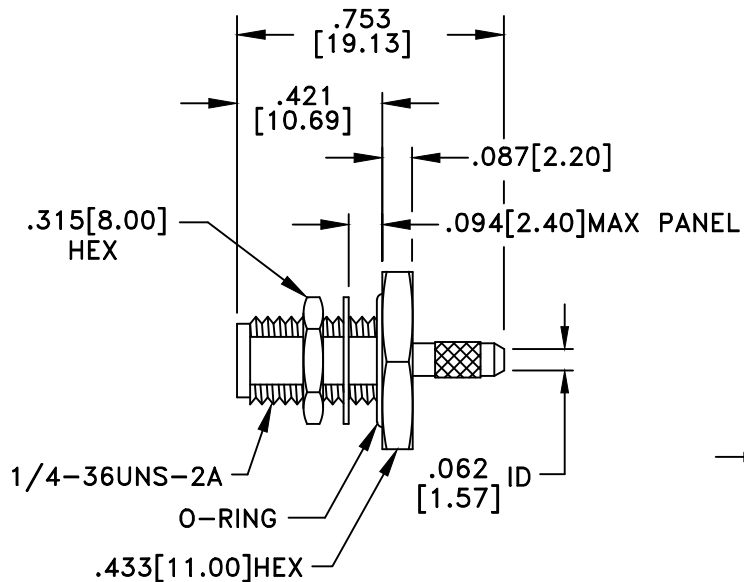

RoHS Compliant

### MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
O-RING	SILICONE RUBBER

50 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES  
6501 W. FRYE ROAD, #23  
CHANDLER, AZ 85226

SMA FEMALE BULKHEAD  
CRIMP CABLE END  
for RG316, RG174

Designed by  
P. CHEN

Checked by  
S. NEUGESS

Approved by  
A. LEE

File name  
MWA-6051-G-316

TITLE  
MWA-6051-G-316

TOLERANCES  
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED  
DECIMALS ANGULAR  
.XX ± .02 ± .06  
.XXX ± .005

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE  
PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

REV. 1	Scale NONE
DATE 020605	Sheet 1 of 1