



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	052105	GC
2	Shank, contact and ferrule dimensions changed	082407	GC

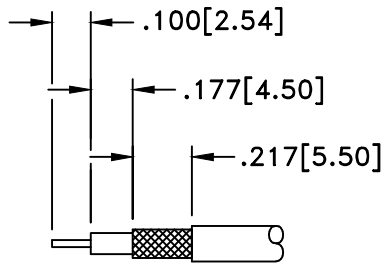

STRIP LENGTHS
M17/113-RG316

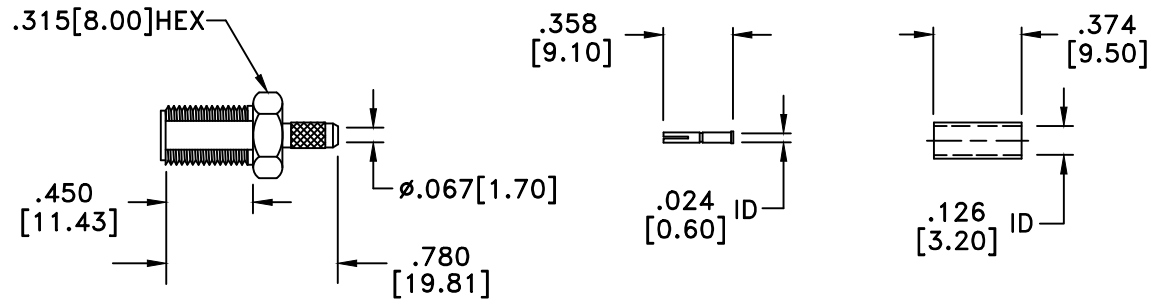

RoHS Compliant

NOTE: INCLUDES LOCKWASHER AND HEX NUT

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	PHOSPHOR BRONZE
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			SMA FEMALE BULKHEAD CRIMP CABLE END for RG316			
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MWA-6099-316	TITLE MWA-6099-316		
<small>TOLERANCES UNLESS OTHERWISE SPECIFIED</small> DIMENSIONS IN INCHES DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 2 DATE 010903	Scale NONE Sheet 1 of 1