



RevNo	Revision Notes	Date	Checked
1	Initial Release	051005	GC
2	Contact Material clarified	051110	GC



RECOMMENDED HOLE PATTERN

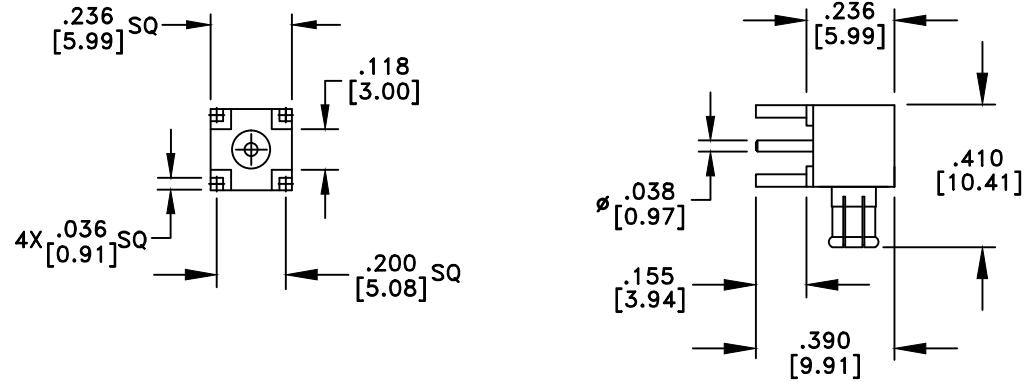

RoHS Compliant

**MATERIALS**

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE  
 500V PEAK VOLTAGE RATING  
 TEMPERATURE RANGE:  $-55^{\circ}\text{C}$  TO  $+155^{\circ}\text{C}$   
 INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

<b>MILLIMETER WAVE TECHNOLOGIES</b> 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			<b>MCX MALE RIGHT ANGLE</b> <b>PCB MOUNT w/4 LEGS</b> <b>50 OHMS</b>			
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MWX-5500-G	TITLE MWX-5500-G		
<b>TOLERANCES UNLESS OTHERWISE SPECIFIED</b> DIMENSIONS IN INCHES DECIMALS .XX $\pm .02$ ANGULAR .XXX $\pm .005$			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 2 DATE 051005	Scale NONE Sheet 1 of 1