




RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	061605	PC



STRIP LENGTH
M17/133-RG405



RECOMMENDED
MOUNTING HOLE

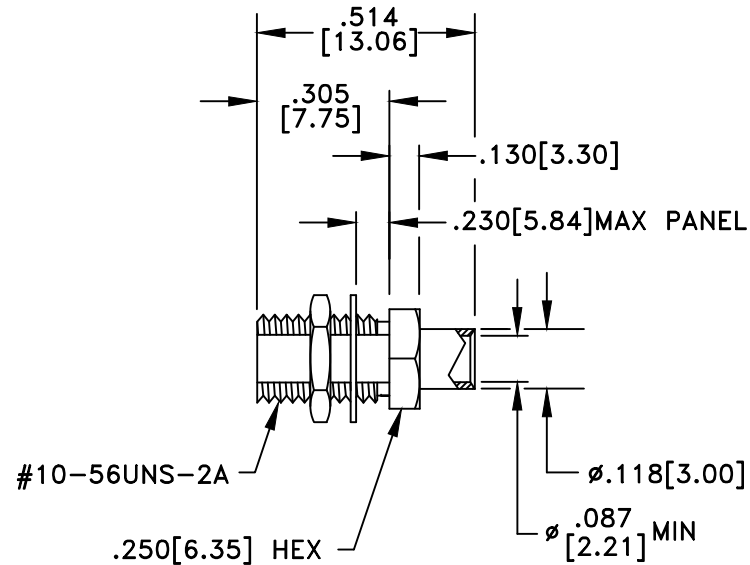

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		MCX FEMALE BULKHEAD SOLDER CABLE END for RG405	
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MWX-5560-G-086
TITLE MWX-5560-G-086			REV. 1
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS .XX ± .02 .XXX ± .005			Scale NONE
ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.			DATE 082004
			Sheet 1 of 1