
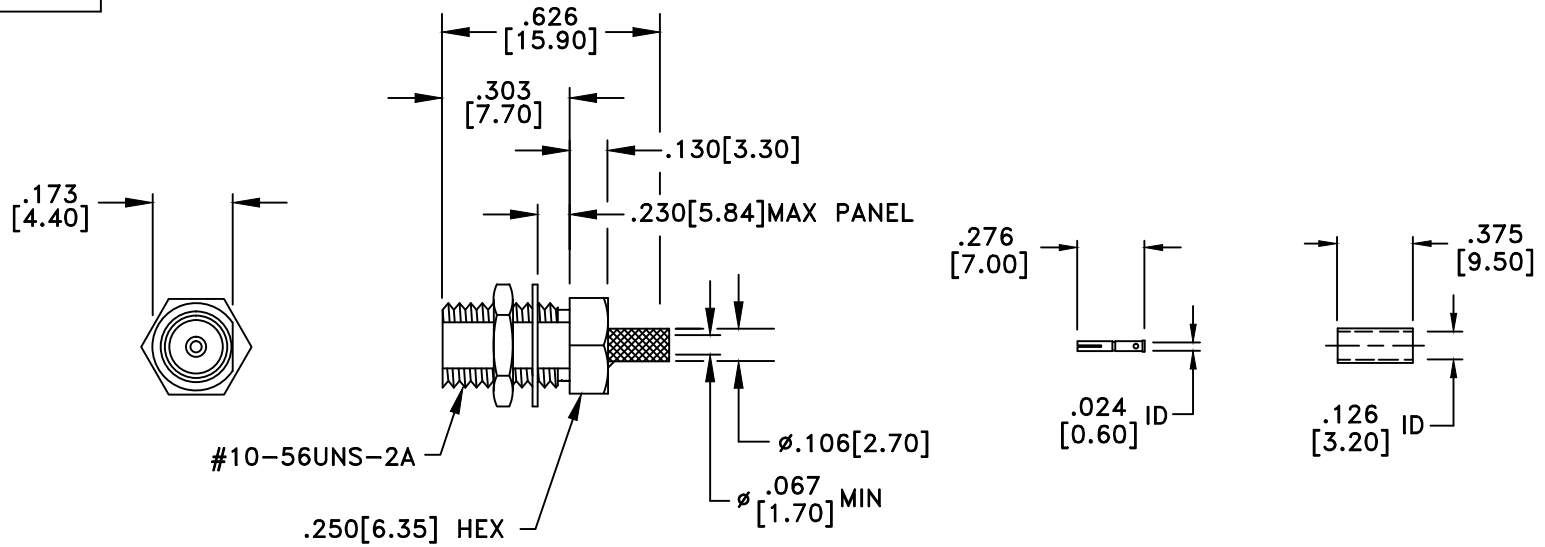


RevNo	Revision Notes	Date	Checked
1	Initial Release	061605	PC

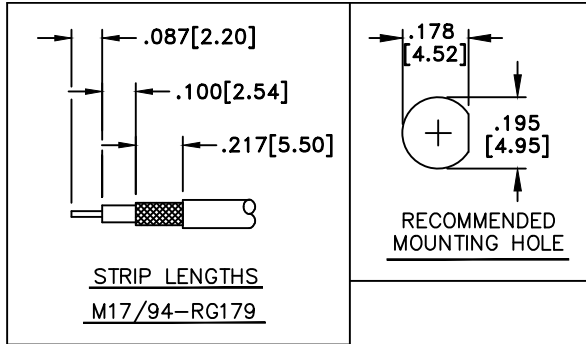

RoHS Compliant

**MATERIALS**

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

75 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		MCX FEMALE BULKHEAD CRIMP CABLE END for RG179, 75 OHMS	
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MWX-5560-G-179
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE MWX-5560-G-179	
DECIMALS .XX ± .02 .XXX ± .005	ANGULAR ± .06	ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
		REV. 1	Scale NONE
		DATE 061605	Sheet 1 of 1