



RevNo	Revision Notes	Date	Checked
1	Overall Length Changed	120402	G.C.
2	Ferrule Dimensions Changed	121002	P.C.
3	Shank tolerance changed	040405	G.C.
4	RoHS Compliant	052005	PC

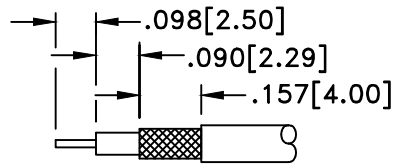

STRIP LENGTHS
RG179

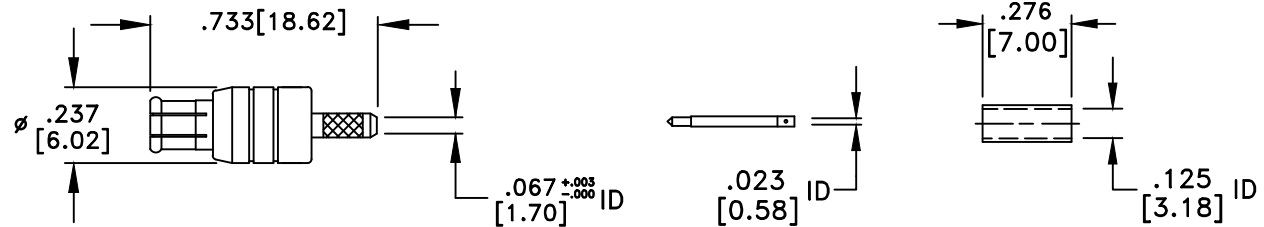

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
FERRULE	BRASS
FERRULE PLATING	GOLD

75 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		MCX PLUG CRIMP/SOLDER CABLE END for RG179	
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWX-6001G-179
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE MWX-6001G-179	
DECIMALS .XX ± .02 .XXX ± .005	ANGULAR ± .06	ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
		REV. 4	Scale NONE
		DATE 072501	Sheet 1 of 1