


RevNo	Revision Notes	Date	Checked
1	Initial Release	120407	A.L.
2	Contact Diameter changed to .028"	120407	GC
3	Overall length increased to .363"	010708	PC
4	Contact diameter corrected	030518	PC

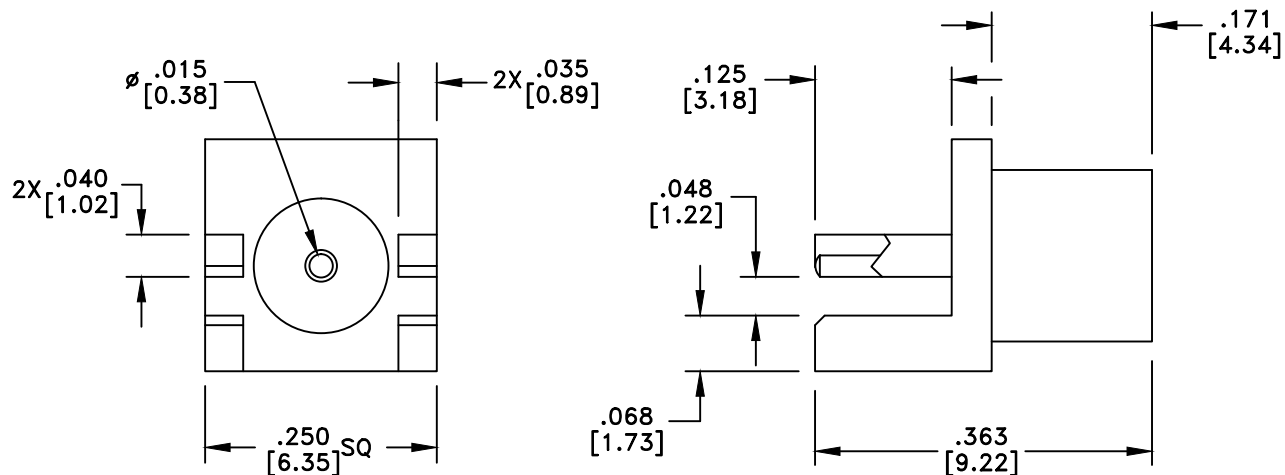

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

75 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO $+155^{\circ}\text{C}$
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

MCX JACK
PCB EDGE MOUNT
75 OHMS

Designed by N. JAIN	Checked by S. NEUGESS	Approved by A. LEE	File name MWX-6800-G-75	TITLE MWX-6800-G-75
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS ANGULAR .XX $\pm .02$ $\pm .06$.XXX $\pm .005$		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 4 DATE 120407 Scale NONE Sheet 1 of 1