



RevNo	Revision Notes	Date	Checked
1	Initial Release	112707	PC



RECOMMENDED
HOLE PATTERN

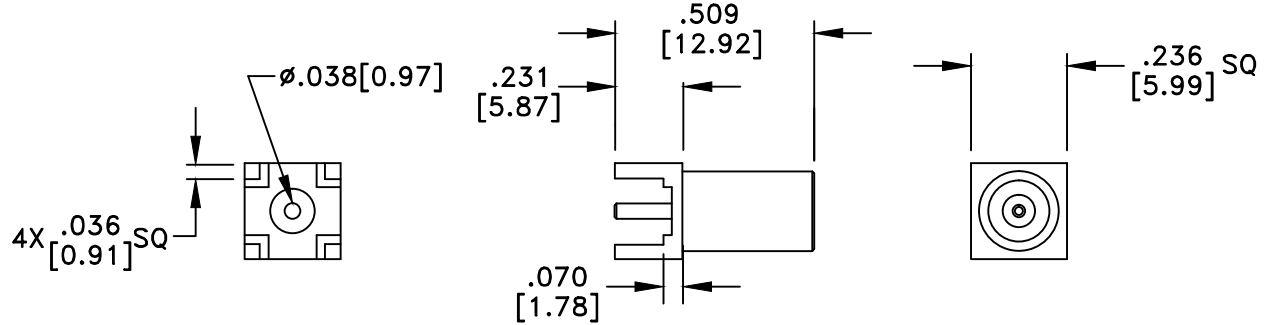

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

75 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO $+155^{\circ}\text{C}$
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			MCX JACK VERTICAL EXTENDED PCB MOUNT 75 Ohms		
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWX-7700-GE-75	TITLE MWX-7700-GE-75	
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS ANGULAR .XX \pm .02 \pm .06 .XXX \pm .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		
			REV. 1	Scale NONE	
			DATE 112707	Sheet 1 of 1	