



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	062005	PC
2	Ferrule ID changed; shank ID called out	122005	GC

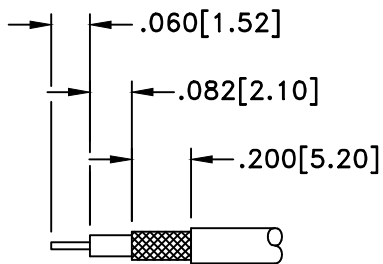

STRIP LENGTHS
M17/94-RG-179

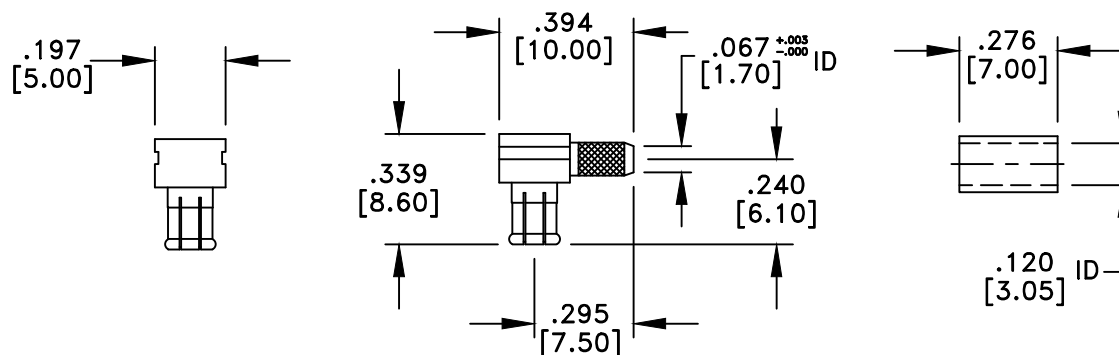

RoHS Compliant

MATERIAL

BODY	BRASS
BODY PLATING	GOLD
PIN	BRASS
PIN PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
FERRULE	BRASS
FERRULE PLATING	GOLD
SCREW CAP	BRASS
SCREW CAP PLATING	GOLD

75 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

MCX PLUG RIGHT ANGLE
CABLE END for RG179

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWX-8001-G-179	TITLE MWX-8001-G-179
<p>TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005 ± .06 DO NOT SCALE THIS DRAWING</p>			<p>ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.</p>	
			REV. 2	Scale NONE
			DATE 020601	Sheet 1 of 1