



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	070105	GC

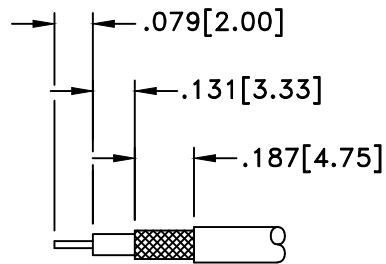

STRIP LENGTHS
RG316

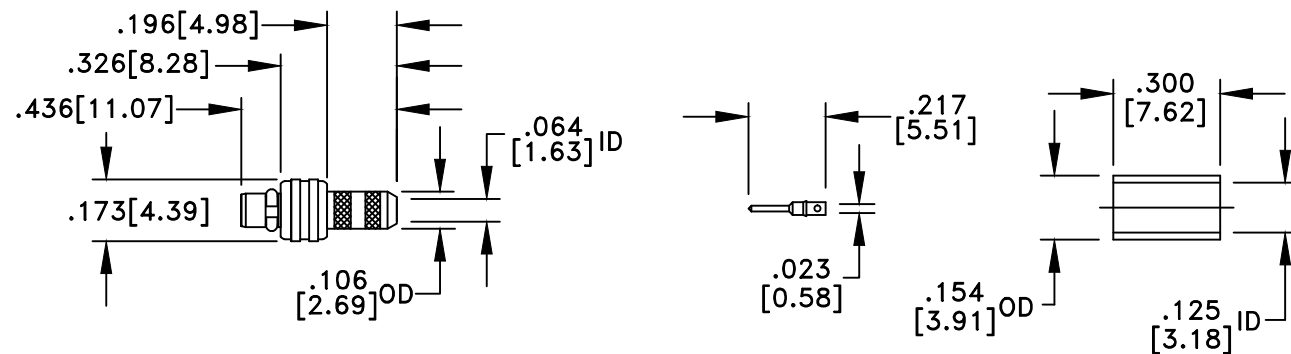

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BRASS
CONTACT PLATING	30u" GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

MMCX PLUG CRIMP CABLE END
for RG316

Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MWXX-6001G-316	TITLE MWXX-6001G-316
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
			REV. 1	Scale NONE
			DATE 062201	Sheet 1 of 1