



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	051005	PC

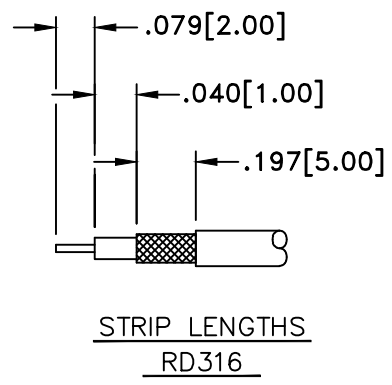

STRIP LENGTHS
RD316

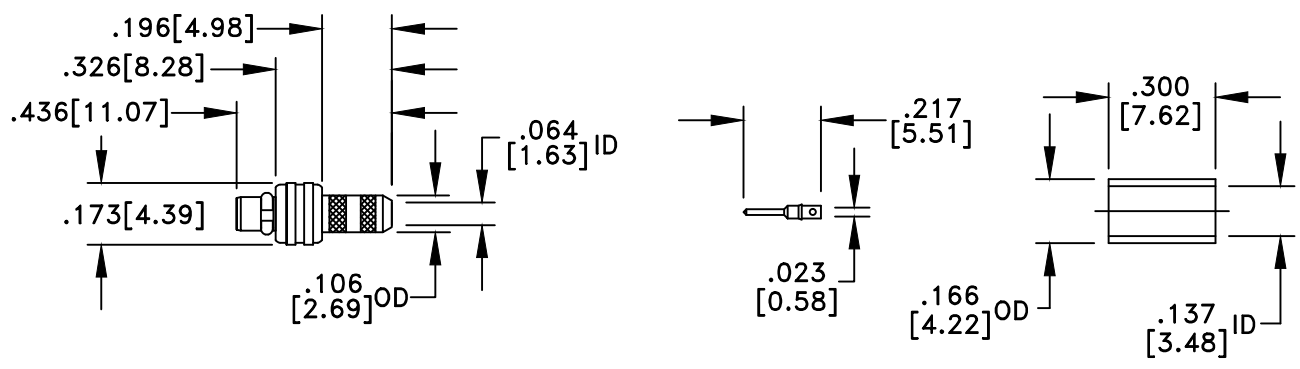

RoHS COMPLIANT

MATERIALS	
BODY	BRASS
BODY PLATING	GOLD
CONTACT	BRASS
CONTACT PLATING	30u" GOLD
DIELECTRIC	TEFLON (PTFE)
50 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		MMCX MALE CRIMP CABLE END for RD316	
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MWXX-6001G-D316
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE MWXX-6001G-D316	
DECIMALS .XX ± .02 .XXX ± .005	ANGULAR ± .06	ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
		REV. 1	Scale NONE
		DATE 062201	Sheet 1 of 1