



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	091806	PC
2	Plating thickness added	102414	PC
3	Plating thickness corrected	110514	PC
4	Tape and reel required	012915	GC



RECOMMENDED HOLE PATTERN

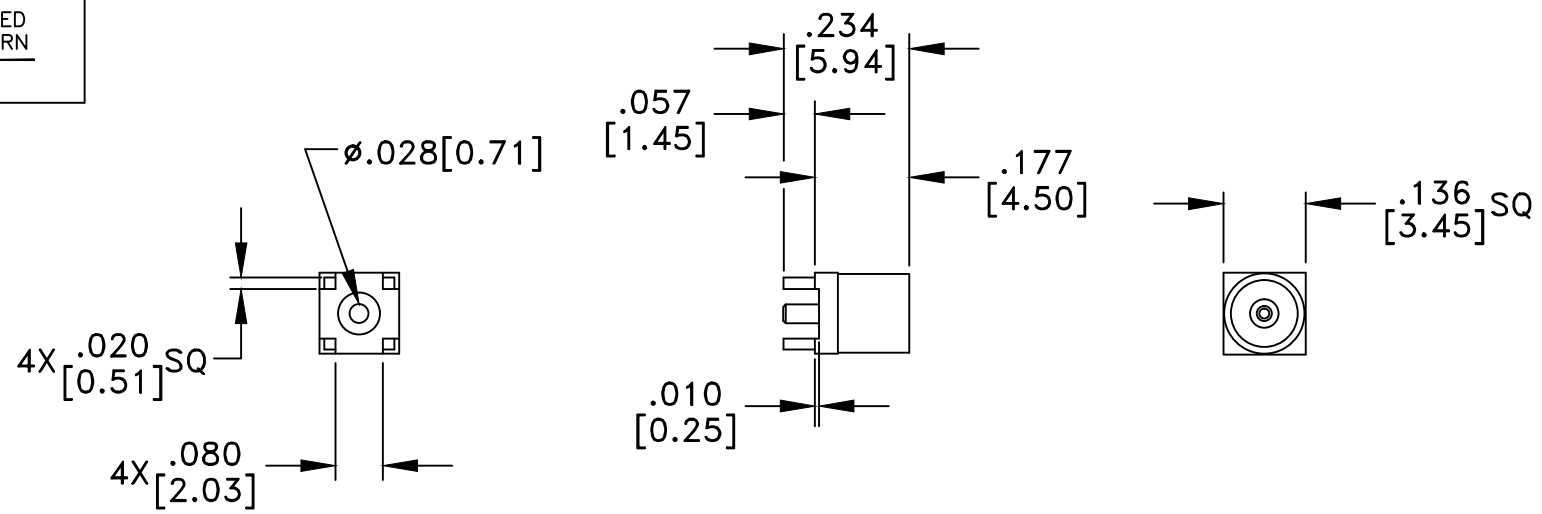

RoHS Compliant

MATERIALS	
BODY	BRASS
BODY PLATING	GOLD 10u"
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD 30u"
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012
OPERATING FREQUENCY: DC to 6 GHz
MATING CYCLES: 500 MINIMUM

Note: Tape & Reel packaging

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			MMCX FEMALE VERTICAL PCB MOUNT			
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWXX-7700G-057	TITLE MWXX-7700G-057		
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 4 DATE 090205	Scale NONE Sheet 1 of 1