


RevNo	Revision Notes	Date	Checked
1	Initial Release	012010	PC

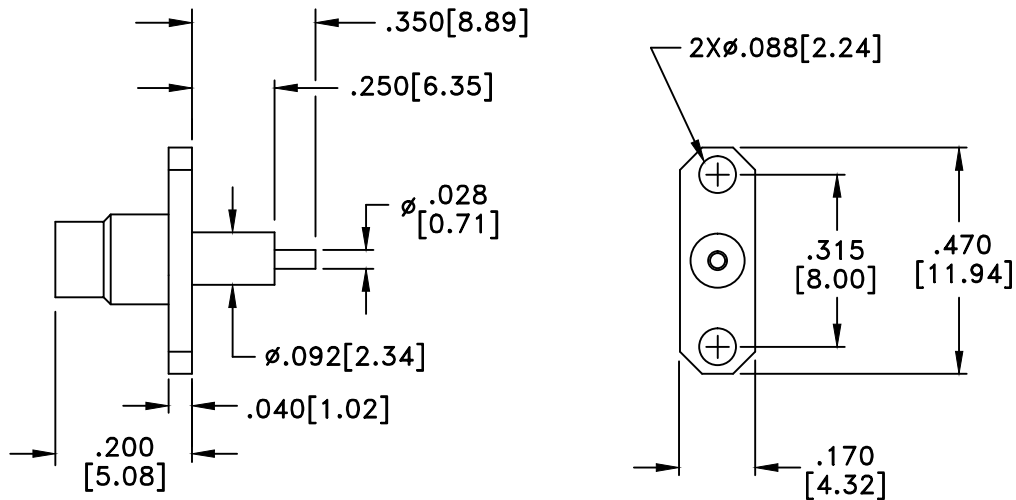

RoHS Compliant

MATERIALS	
BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
50 Ohm IMPEDANCE 500V PEAK VOLTAGE RATING TEMPERATURE RANGE: -55°C TO +155°C INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			MMCX JACK FLANGE MOUNT 2 HOLE FLANGE EXTENDED DIELECTRIC		
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWXX-9012G-0609	TITLE MWXX-9012G-0609	
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS .XX ± .02 .XXX ± .005		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.			REV. 1 DATE 012010
			Scale NONE Sheet 1 of 1		