




RevNo	Revision Notes	Date	Checked
1	Initial Release	062007	PC
2	Overall design change	062107	PC
3	Flat Rotated 90 degrees	072707	PC

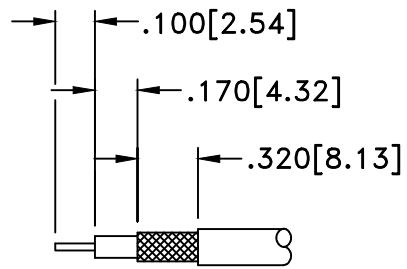

STRIP LENGTHS
M17/94-RG179



RECOMMENDED
MOUNTING HOLE

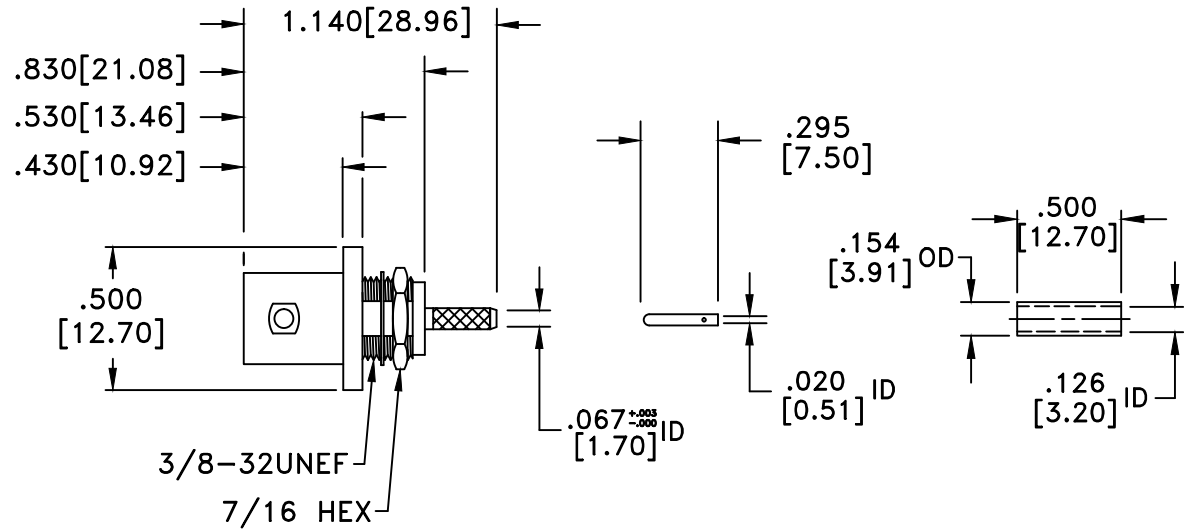

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	PHOSPHOR BRONZE
CONTACT PLATING	GOLD
DIELECTRIC	DELTRIN

75 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

BNC FEMALE FRONT MOUNT
CRIMP CABLE END
for RG179
75 OHMS

Designed by
P. CHEN

Checked by
S. NEUGESS

Approved by
A. LEE

File name
MW-233-A-179-75

TITLE
MW-233-A-179-75

TOLERANCES
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
DECIMALS ANGULAR
.XX ± .02 ± .06
.XXX ± .005

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE
PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

REV. 3	Scale NONE
DATE 062007	Sheet 1 of 1