


RoHS Compliant

MATERIALS	
BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
GASKET	SILICONE RUBBER
50 Ohm IMPEDANCE 500V PEAK VOLTAGE RATING TEMPERATURE RANGE: -55°C TO +155°C INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

RevNo	Revision Notes	Date	Checked
1	Overall design change	102703	PC
2	Ferrule ID and OD changed	011004	GC
3	RoHS compliant	091505	GC
4	Ferrule dimension corrected	062414	GC

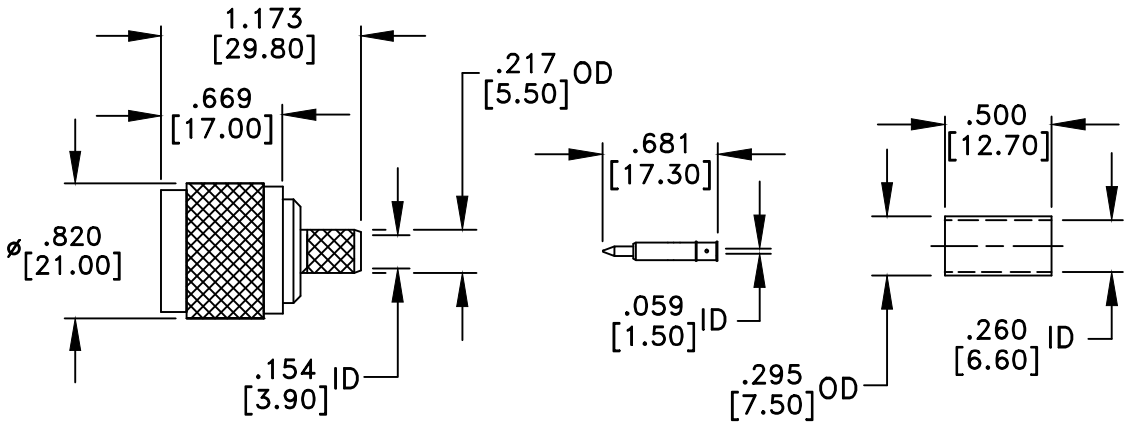

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			N PLUG CRIMP CABLE END for LMR240			
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-350-LMR240	TITLE MW-350-LMR240		
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 4 DATE 102303	Scale NONE Sheet 1 of 1