



RevNo	Revision Notes	Date	Checked
1	Initial Release	072511	GC



RoHS COMPLIANT

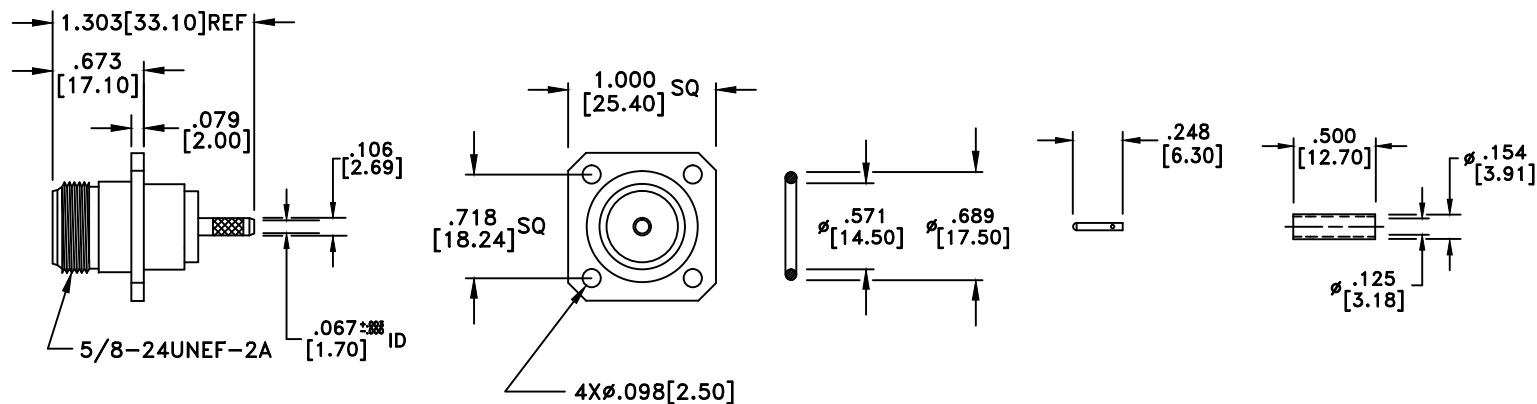

MATERIALS	
BODY	BRASS
BODY PLATING	NICKEL
O-RING	SILICONE RUBBER
SHANK PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	30u" GOLD
DIELECTRIC	TEFLON (PTFE)
50 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			N FEMALE PANEL MOUNT 4 HOLE FLANGE for RG316		
Designed by N. JAIN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-375-316	TITLE MW-375-316	
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS                      ANGULAR .XX ± .02                      ± .06 .XXX ± .005				ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
				REV. 1	Scale NONE
				DATE 072511	Sheet 1 of 1