



RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	081205	PC

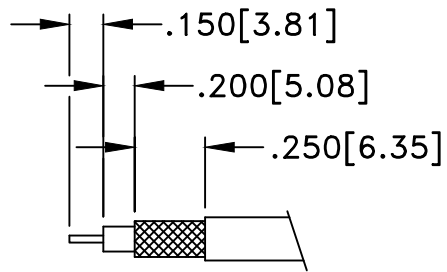

STRIP LENGTHS
M17/113-RG316

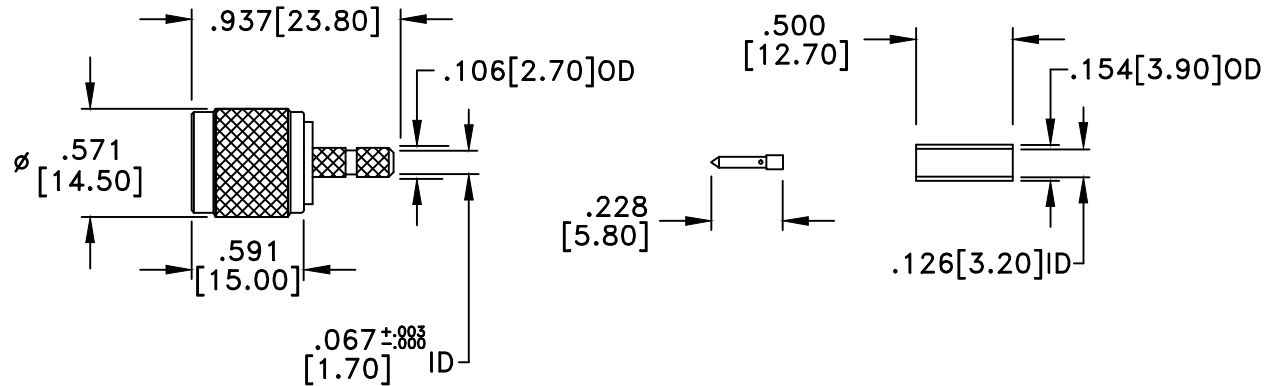

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CENTER PIN	PHOSPHOR BRONZE
CENTER PIN PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
BULLET PIN	BRASS
GASKET	SILICONE

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

NOTE: FEMALE CONTACT IS BUILT-IN

MILLIMETER WAVE TECHNOLOGIES 1881 E. MINTON DR. TEMPE, AZ 85282		TNC REVERSE POLARITY PLUG (FEMALE CONTACT) CRIMP TYPE for RG-316	
Designed by N. JAIN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-750-RP-316
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE MW-750-RP-316	
DECIMALS .XX ± .02 .XXX ± .005	ANGULAR ± .06	ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	
		REV. 1	Scale NONE
		DATE 032102	Sheet 1 of 1