
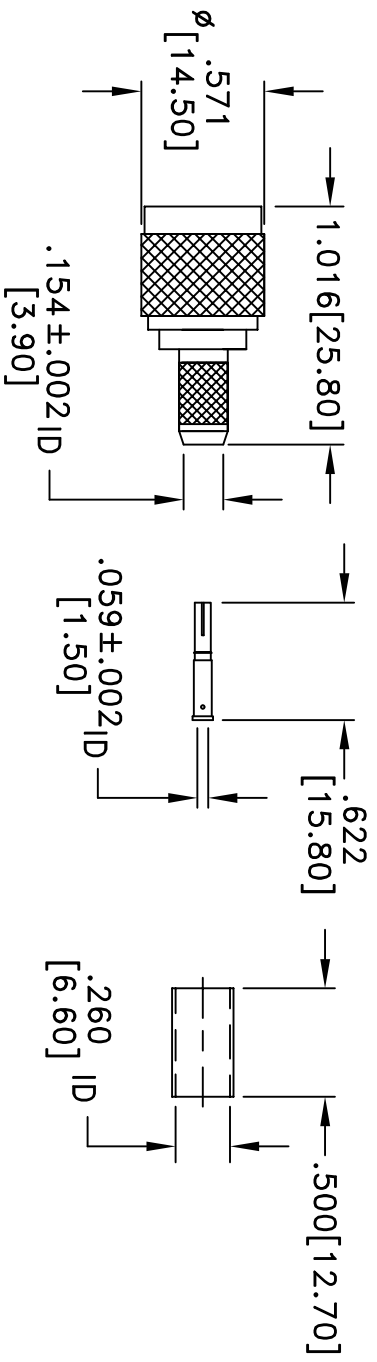


RevNo	Revision Notes	Date	Checked
1	Initial Release	10/20/4	GC
2	RoHS Compliant	05/10/05	GC

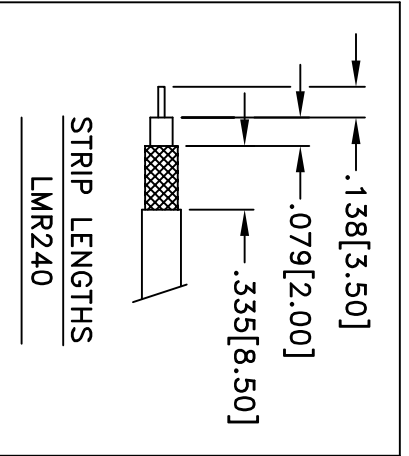

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	PHOSPHOR BRONZE
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
GASKET	SILICONE

50 Ohm IMPEDANCE
 500V PEAK VOLTAGE RATING
 TEMPERATURE RANGE: -55°C TO +155°C
 INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
 6501 W. FRYE ROAD, #23
 CHANDLER, AZ 85226

RP-TNC PLUG
 CRIMP CABLE END
 for LMR240

Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-750-RP-L240	TITLE MW-750-RP-L240
------------------------	--------------------------	-----------------------	-----------------------------	-------------------------

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS .XX ± .02 .XXX ± .005	TOLERANCES ANGULAR ± .06	ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	REV. 2	Scale NONE
			DATE 10/08/04	Sheet 1 of 1