



RevNo	Revision Notes	Date	Checked
1	Initial Release	072601	GC

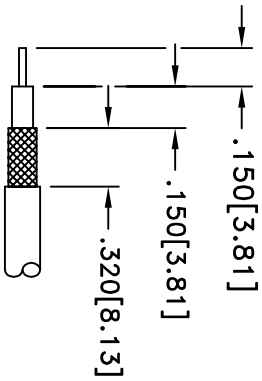

STRIP LENGTHS  
M17/113-RG316




RECOMMENDED  
MOUNTING HOLE

RoHS Compliant

**MATERIALS**

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
O-RING GASKET	SILICONE RUBBER

50 Ohm IMPEDANCE  
500V PEAK VOLTAGE RATING  
TEMPERATURE RANGE: -55°C TO +155°C  
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

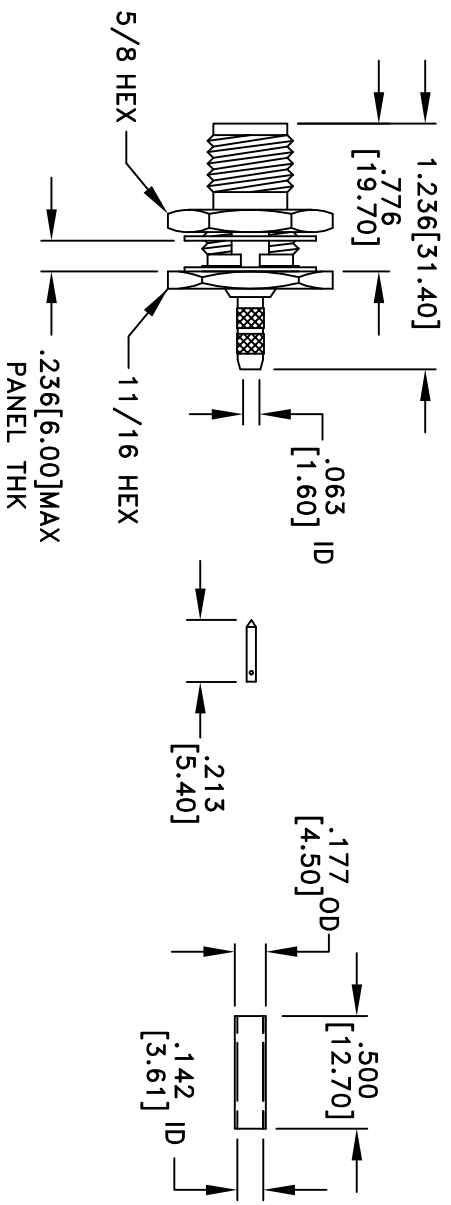

MILLIMETER WAVE TECHNOLOGIES  
6501 W. FRYE ROAD, #15  
CHANDLER, AZ 85226

TNC REVERSE POLARITY  
BULKHEAD CRIMP CABLE END  
for RD316

Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MW-780-E-RPD316	TITLE MW-780-E-RPD316
------------------------	--------------------------	-----------------------	------------------------------	--------------------------

TOLERANCES UNLESS OTHERWISE SPECIFIED		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.	REV.	Scale
DIMENSIONS IN INCHES DECIMALS .XX ± .02 .XXX ± .005	ANGULAR ± .06		1	NONE
			DATE 072601	Sheet 1 of 1