

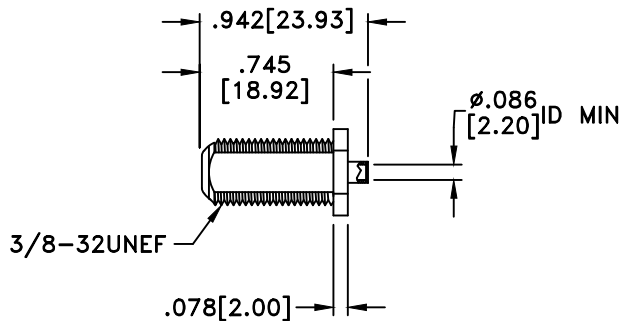


RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	051205	GC
2	Strip Lengths Added	061609	GC
3	Hex Nut and Washer included	011210	GC



RoHS Compliant

Hex Nut and Internal Tooth Lockwasher Included

MATERIAL	
BODY	BRASS
BODY PLATING	BRIGHT ACID TIN
CONTACT	BRASS/BeCu
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
75 Ohm IMPEDANCE	
500V PEAK VOLTAGE RATING	
TEMPERATURE RANGE: -55°C TO +155°C	
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012	

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226			HIGH PERFORMANCE F BULKHEAD JACK SOLDER CABLE END for .086" SEMI-RIGID		
Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MW-820-086-75D	TITLE MW-820-086-75D	
TOLERANCES DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .xx ± .02 ± .06 .xxx ± .005 DO NOT SCALE THIS DRAWING			ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		
			REV. 3	Scale NONE	
			DATE 020401	Sheet 1 of 1	