


RECOMMENDED
HOLE PATTERN

RevNo	Revision Notes	Date	Checked
1	Initial Release	051509	PC
2	Stand-off pads added; Contact diameter changed	021314	GC
3	Center pin to end of threads dimension revised	021914	GC
4	Body changed to 6.3mm square	051514	GC

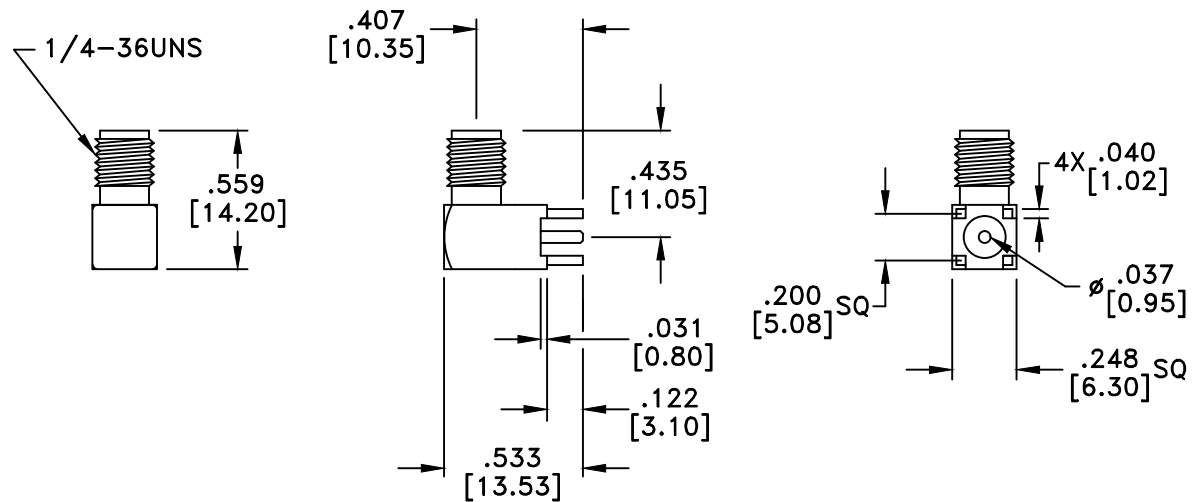

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

SMA FEMALE JACK
RIGHT ANGLE PCB MOUNT

Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MWA-3300-G-B	TITLE MWA-3300-G-B	
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS .XX ± .02 ANGULAR .XXX ± .005		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 4 DATE 051509	Scale NONE Sheet 1 of 1