


STRIP LENGTHS
RG405

RevNo	Revision Notes	Date	Checked
1	Initial Release	112105	GC
2	Spacer added	091614	GC

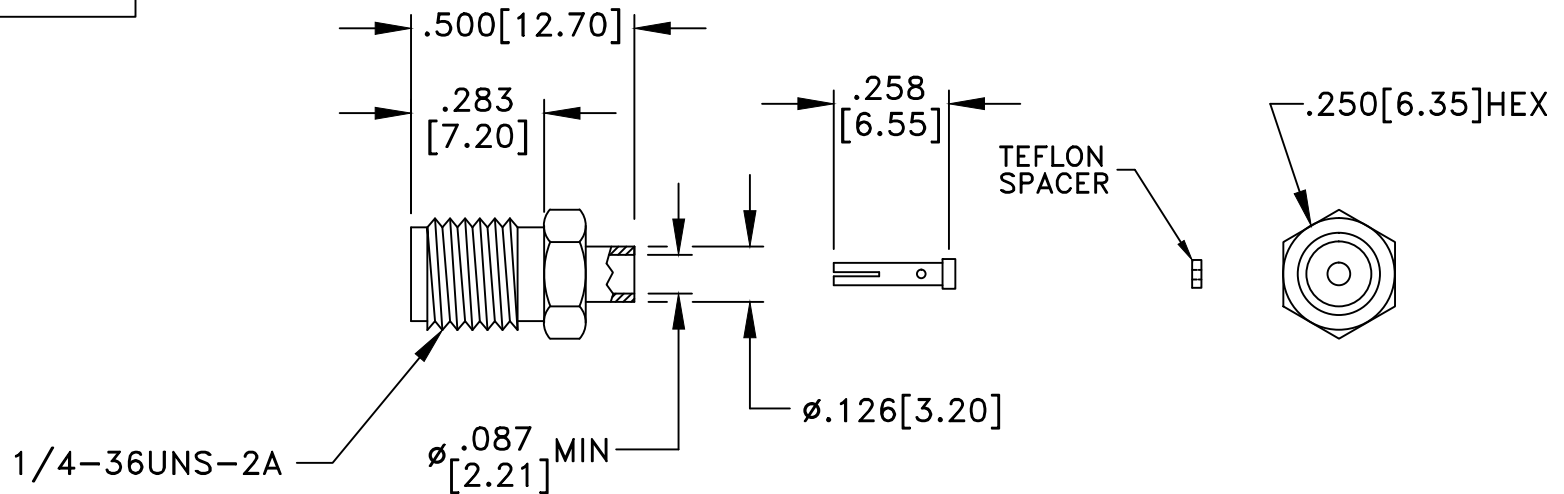

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES 6501 W. FRYE ROAD, #23 CHANDLER, AZ 85226		SMA FEMALE SOLDER CABLE END for .086" RG405	
Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MWA-6041AG-086
TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS .XX ± .02 .XXX ± .005		TITLE MWA-6041AG-086	
ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 2	Scale NONE
		DATE 112105	Sheet 1 of 1