



RevNo	Revision Notes	Date	Checked
1	Initial Release	061014	GC



STRIP LENGTHS
M17/130-RG402

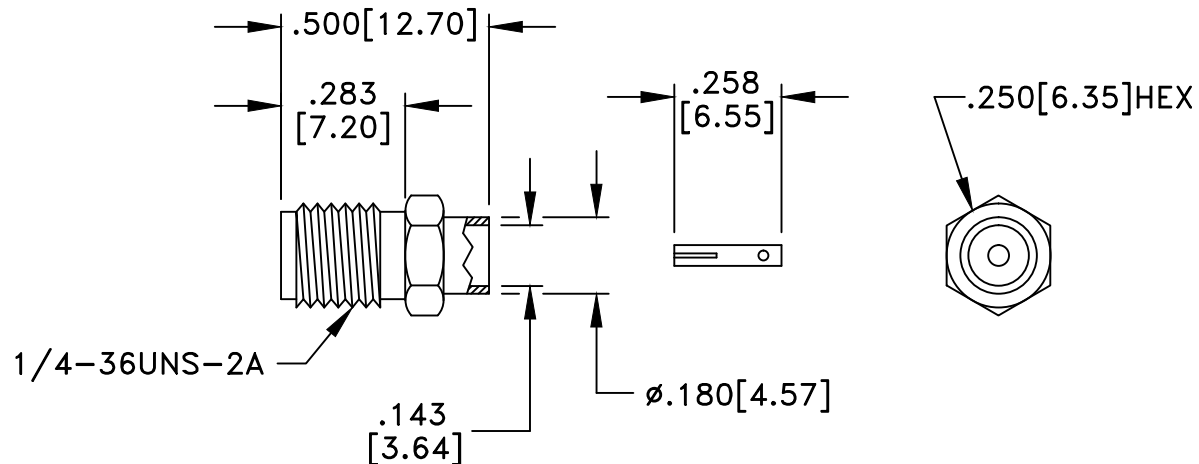

RoHS COMPLIANT

MATERIALS

BODY	BRASS
BODY PLATING	GOLD
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	50u" GOLD
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

SMA FEMALE SOLDER CABLE END
for .141" RG402

Designed by P. CHEN	Checked by S. NEUGESS	Approved by A. LEE	File name MWA-6041AG-141	TITLE MWA-6041AG-141
------------------------	--------------------------	-----------------------	-----------------------------	-------------------------

TOLERANCES
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
DECIMALS ANGULAR
.XX ± .02 ± .06
.XXX ± .005

ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE
PURPOSES ONLY AND ARE SUBJECT TO CHANGE.

REV. 1	Scale NONE
DATE 061014	Sheet 1 of 1